



558 Federal Road, Brookfield, CT 06804
O. (203) 885-0627 | F. (203) 740-2441
sheetmetal@mywinair.com | www.mywinair.com

2019

SHEET METAL
FABRICATION STANDARDS



558 Federal Road, Brookfield, CT 06804
 O. (203) 885-0627 | F. (203) 740-2441
 sheetmetal@mywinair.com | www.mywinair.com

1 in. Wg Static Pos. or Neg.	5ft Joints					
	Duct Dimension (in.)	Min. GA	Joint Reinf.	Mid Panel Reinf.	Joints/Reinf.	
Lock Min. GA					Connection Joint Reinf.	Connection Spacing Reinf.
0-8	24	N/R	N/R	PITTS	S&D	60
19-36	24	N/R	N/R	PITTS	TDC	56
37-54	22	N/R	N/R	PITTS	TDC	56
55-72	22	N/R	MPT	PITTS	TDC	56
73-96	20	JTR	MPT	PITTS	TDC	56
97	18	2-JTR	2-MPT	PITTS	Ductmate	60

**5ft Coil/Sheet Stock/ (TDC/TDF) Duct Reinforcement ¾ Tie-Rods
 USA Steel G90
 Ductmate connections: Any duct larger than 96"**

- N/R -Not Required
- N/A -Not Applicable
- JTR -Joint Tie Rod
- MPT -Mid Panel Tie Rod(s)



558 Federal Road, Brookfield, CT 06804
 O. (203) 885-0627 | F. (203) 740-2441
 sheetmetal@mywinair.com | www.mywinair.com

2 in. Wg Static Pos. or Neg.	5ft Joints					
	Min. GA	Joint Reinf.	Mid Panel Reinf.	Joints/Reinf.		
				Lock Min. GA	Connection Joint Reinf.	Connection Spacing Reinf.
Duct Dimension (in.)						
0-8	24	N/R	N/R	PITTS	S&D	59
19-30	24	N/R	N/R	PITTS	TDC	56
31-36	22	N/R	N/R	PITTS	TDC	56
37-54	20	N/R	MPT	PITTS	TDC	56
55-72	18	JTR	MPT	L PITTS	TDC	56
73-96	18	JTR	3-MPT	L PITTS	TDC	56
97	18	3-JTR	3-MPT	L PITTS	Ductmate	60

**5ft Coil/Sheet Stock/ (TDC/TDF) Duct Reinforcement 3/4 Tie-Rods
 USA Steel G90
 Ductmate connections: Any duct larger than 96"**

- N/R -Not Required
- N/A -Not Applicable
- JTR -Joint Tie Rod
- MPT -Mid Panel Tie Rod(s)



558 Federal Road, Brookfield, CT 06804
 O. (203) 885-0627 | F. (203) 740-2441
 sheetmetal@mywinair.com | www.mywinair.com


4 in. Wg Static Pos. or Neg.	5ft Joints					
	Min. GA	Joint Reinf.	Mid Panel Reinf.	Joints/Reinf.		
Duct Dimension (in.)				Lock Min. GA	Connection Joint Reinf.	Connection Spacing Reinf.
0-12	24	N/R	N/R	PITTS	TDC	56
13-30	22	N/R	N/R	PITTS	TDC	56
31-48	20	N/R	N/R	PITTS	TDC	56
49-54	20	N/R	MPT	PITTS	TDC	56
55-72	18	N/R	MPT	L PITTS	TDC	56
73-96	16	JTR	MPT	L PITTS	Ductmate	60
97	16	JTR	MPT	L PITTS	Ductmate	60

**5ft Coil/Sheet Stock/ (TDC/TDF) Duct Reinforcement 3/4 Tie-Rods
 USA Steel G90
 Ductmate connections: Any duct larger than 96"**

- N/R -Not Required
- N/A -Not Applicable
- JTR -Joint Tie Rod
- MPT -Mid Panel Tie Rod(s)



558 Federal Road, Brookfield, CT 06804
O. (203) 885-0627 | F. (203) 740-2441
sheetmetal@mywinair.com | www.mywinair.com

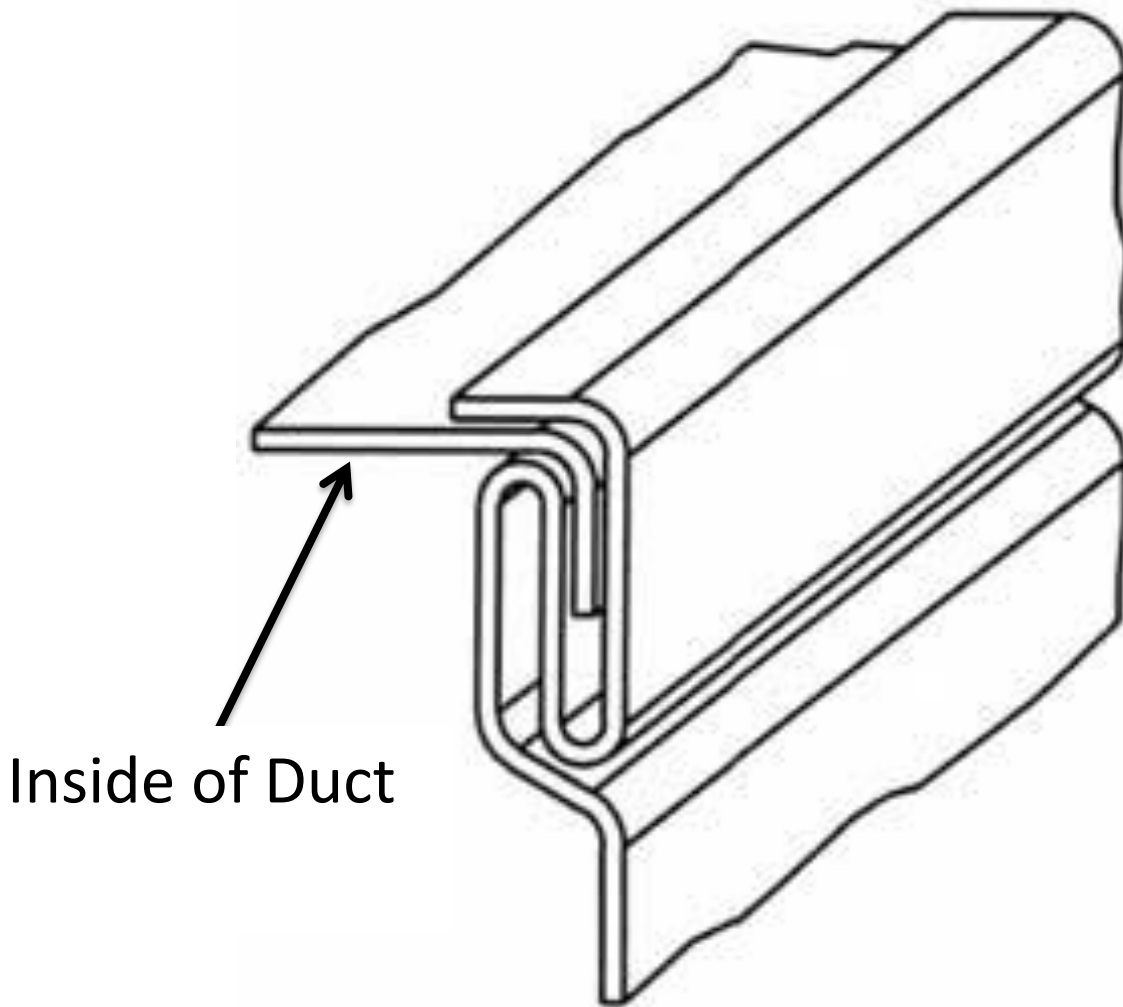

PITTSBURGH SEAM

Large: 1-1/4" Allowance

Small: 1" Allowance

6 in. wg Static Pos. or Neg.	5 ft Joints			5 ft Joints w/2 ½ ft Reinf. Spacing				
	Min ga	Joint Reinf.	Alt. Joint Reinf.	Joints/Reinf.			Int. Reinf.	
				Min ga	Joint Reinf.	Alt. Joint Reinf.	Tie Rod	Alt. Reinf.
Duct Dimension								
8 in. and under	26	N/R	N/A	Use 5 ft Joints				
9 – 10 in.	24	N/R	N/A	26	N/R	N/R	MPT	B
11 – 12 in.	24	N/R	N/A	26	N/R	N/R	MPT	C
13 – 14 in.	22	N/R	N/A	26	N/R	N/R	MPT	C
15 – 16 in.	22	N/R	N/A	26	N/R	N/R	MPT	C
17 – 18 in.	22	N/R	N/A	26	N/R	N/R	MPT	D
19 – 20 in.	22	N/R	N/A	26	N/R	N/R	MPT	D
21 – 22 in.	22	N/R	N/A	24	N/R	N/R	MPT	E
23 – 24 in.	22	N/R	N/A	24	N/R	N/R	MPT	E
25 – 26 in.	20	N/R	N/A	24	N/R	N/R	MPT	E
27 – 28 in.	20	JTR	(2) E	22	N/R	N/R	MPT	F
29 – 30 in.	18	N/R	N/R	22	N/R	N/R	MPT	F
31 – 36 in.	18	JTR	(2) H	20	N/R	N/R	MPT	G
37 – 42 in.	16	JTR	(2) H	20	JTR	(2) E	MPT	H
				18	N/R	N/R	MPT	H
43 – 48 in.	16	JTR	(2) H	20	JTR	(2) H	MPT	I
49 – 54 in.	Not Designed			20	JTR	(2) H	MPT	I
55 – 60 in.				20	JTR	(2) H	MPT	I
61 – 72 in.				18	JTR	(2) I	MPT	J
73 – 84 in.				18	JTR	(2) K	2 MPT	L
85 – 96 in.				16	JTR	N/A	2 MPT	It
97 – 108 in.				16	JTR	N/A	X	Jt
109 – 120 in.				16	JTR	N/A	X	Kt

Table 2-20 5 ft Coil/Sheet Stock/T25a/T25b (TDC/TDF) Duct Reinforcement

N/R - Not Required


N/A - Not Applicable

JTR - Joint Tie Rod

MPT - Mid Panel Tie Rod(s)

(2) (X) - Indicates 2 external reinforcements of class (X) to be used in lieu of Joint Tie Rods

Note: t following Reinforcement Class letter indicates tie rod required.

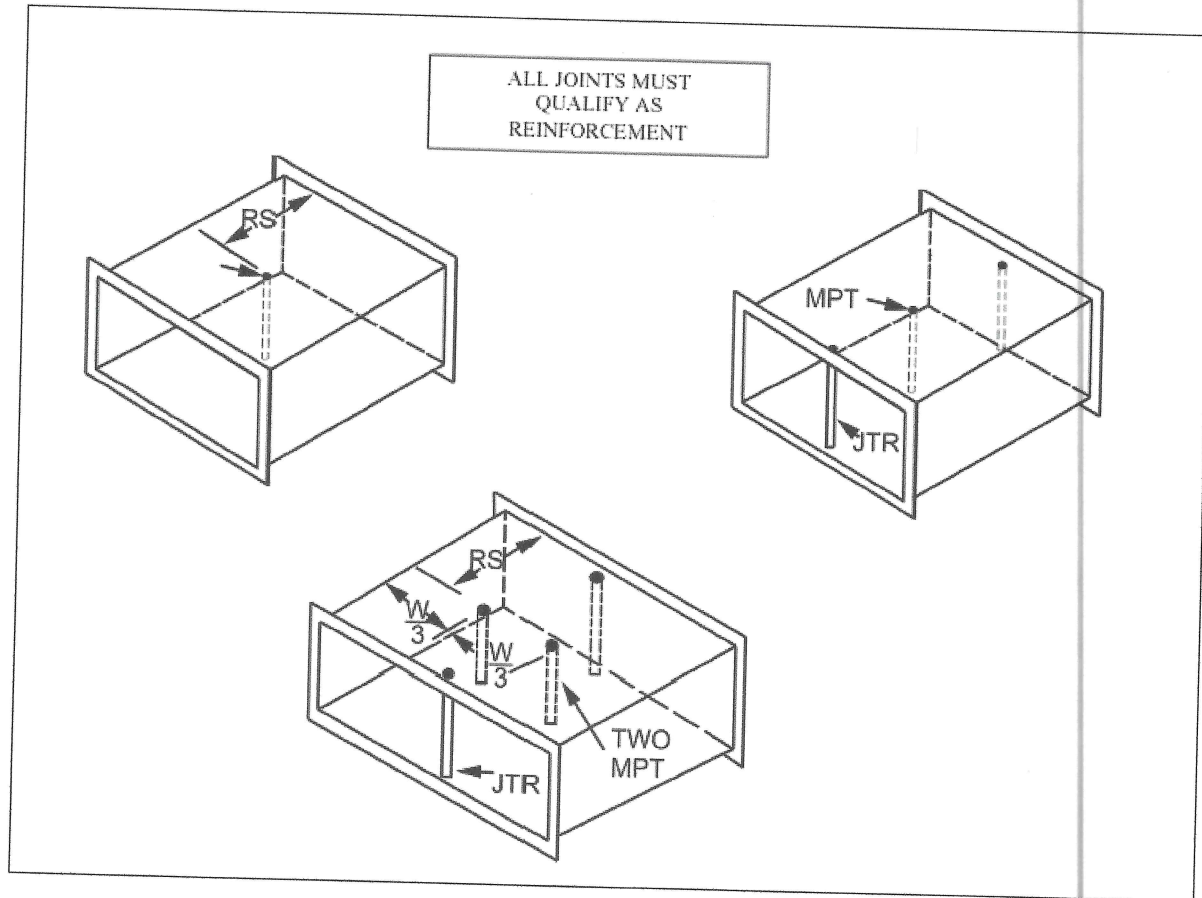

2.9 MIDPANEL TIE ROD SELECTIONS

Example No. 1:

48 × 18 in. (1200 × 450 mm) duct, 2 in. wg (500 Pa) positive pressure per Table 2-3; 5 ft (1.50 m) joint spacing; T-25a or T-25b joints:

In Table 2-3 for 48 in. (1200 mm) width, Column 6 gives reinforcement for 5 ft (1.50 m) RS (reinforcement spacing) as H-20 and Column 9 for 2 1/2 ft (0.75 m) RS as F-24; these are basic alternatives, but the joint ratings must be checked for duct gage override per text Section 2.1.4 and S1.13 and S1.14.

Therefore, for 5 ft (1.50 m) RS option Table 2-32 shows T-25 joints of H Code requiring 18 ga (1.31 mm) duct wall to satisfy the H joint rating; however, T-25 of 20 ga (1.00 mm) with tie rods at the joints (JTR) is I Code which satisfies both Tables 2-3 and 2-32. No between joint reinforcement is required. On the 18 in. (1.31 mm) wide sides, Column 2 shows that reinforcement is not required.

For 48 in. (1200 mm) width, the alternative of 2-1/2 ft (0.75 m) RS would only require 24 ga (0.70 mm) duct


wall per Table 2-3, Column 9, but the F Code in Table 2-32 requires the use of T-25 of 22 ga (0.85 mm) duct wall, an override upgrade from Table 2-3. No tie rod is required at the joint, but one must be used at mid panel between joints (unless external reinforcement per Table 2-29 and 2-30 is used there). 22 ga (0.85 mm) metal will be used on all four sides; see text section 2.1.1 (3). On the 18 in. (1.31 mm) side, T-25 of 22 ga (0.85 mm) is F Code (which exceeds the C Code required in Column 9 of Table 2-3).

The requirements for tie rods at T-25 joints are the same as they would be for external reinforcement systems. The joints must qualify independently according to the reinforcement interval. For the conditions in Example No. 1, rods at T-25 joints are only required for 5 ft (1.50 m) RS intervals. Therefore, the rod size for the joint is selected based on one rod per Fig. 2-5(G) or two rods per Fig. 2-5(D) and the load from Table 2-34. In Table 2-34, the load for 2 in. wg (500 Pa) and 5 ft (1.50 m) RS on 48 in. (1200 mm) width is 156 pounds (70.76 kgs) (for one rod or 78 pounds (35.38 kgs) for each of two). From Table 2-35, 1/4 in. (6.4 mm) rod suffices. From S1.19.4, 1/2 in. (12.7 mm) EMT is adequate.

NOTE:


SEE TYPICAL DUCT BRANCH ENTRY CONDITION IN FIG. 4-6.

METAL NOSING MUST BE USED WHEREVER LINER IS PRECEDED BY UNLINED METAL; OTHERWISE WHEN VELOCITY EXCEEDS 4000 FPM (20.3 MPS) USE METAL NOSING ON EVERY LEADING EDGE. NOSING MAY BE FORMED ON DUCT OR BE CHANNEL OR ZEE ATTACHED BY SCREWS, RIVETS OR WELDS.



DETAIL - A
METAL NOSING
CHANNEL OR ZEE

INTERIOR WIDTH OF 8" (200 mm) AND LESS DOES NOT REQUIRE PINS.

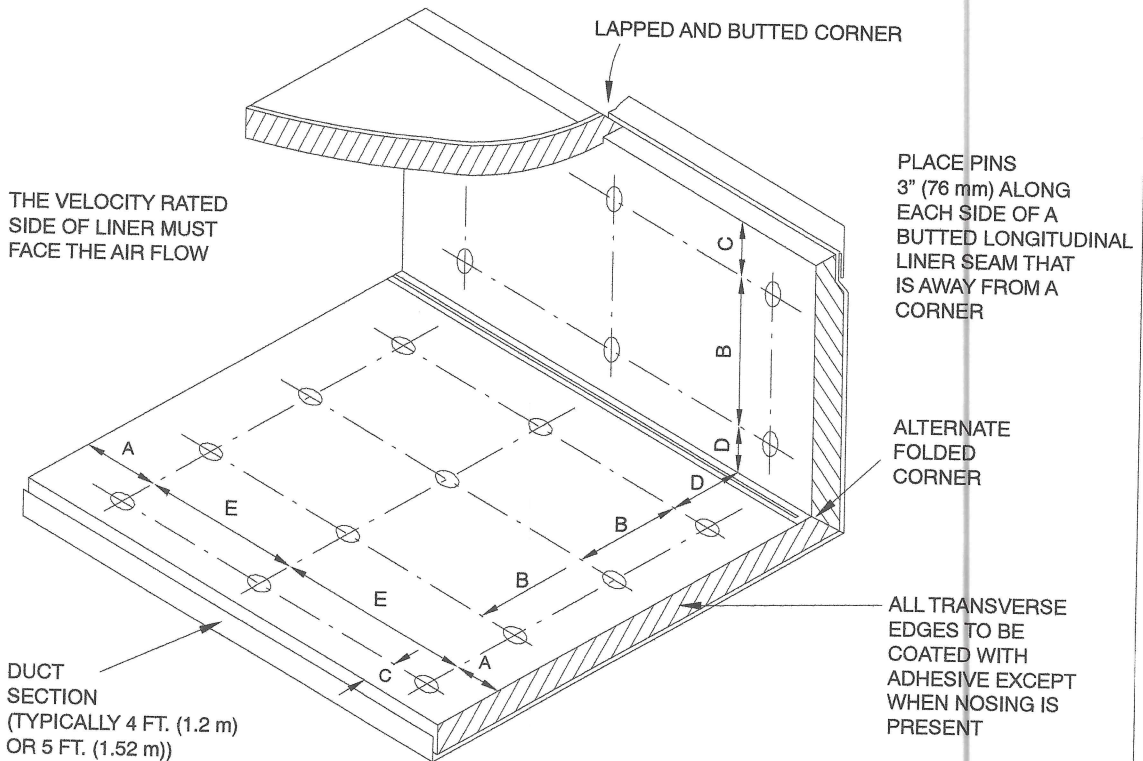

MAXIMUM SPACING FOR FASTENERS.
ACTUAL INTERVALS ARE APPROXIMATE.

"A" PIN ROW MAY BE OMITTED WHEN METAL NOSING IS USED. "E" THEN STARTS FROM THE NOSING.

Velocity *	Dimensions				
	A	B	C	D	E
0 - 2500 FPM (0 - 12.7 MPS)	3" (76.2)	12" (305)	4" (102)	6" (152)	18" (457)
2501 - 6000 FPM (12.7 - 30.5 MPS)	3" (76.2)	6" (152)	4" (102)	6" (152)	16" (406)

* UNLESS A LOWER LEVEL IS SET BY MANUFACTURER OR LISTING AGENCY

FIGURE 7-11 FLEXIBLE DUCT LINER INSTALLATION





Sheet Metal Fabrication
(203)885-0627
558 Federal Rd, Brookfield, CT 06804
Place orders at sheetmetal@mywinair.com

Oval Spiral Duct Sizes

6"	8"	10"	12"	14"	16"	18"
16 / 6	17 / 8	17 / 10	18 / 12	21 / 14	20 / 16	25 / 18
19 / 6	20 / 8	20 / 10	22 / 12	24 / 14	23 / 16	28 / 18
22 / 6	24 / 8	23 / 10	25 / 12	27 / 14	26 / 16	31 / 18
25 / 6	27 / 8	26 / 10	28 / 12	30 / 14	29 / 16	34 / 18
18 / 6	30 / 8	29 / 10	31 / 12	33 / 14	32 / 16	37 / 18
31 / 6	33 / 8	32 / 10	34 / 12	36 / 14	35 / 16	40 / 18
34 / 6	37 / 8	35 / 10	37 / 12	39 / 14	38 / 16	43 / 18
37 / 6	40 / 8	38 / 10	41 / 12	42 / 14	41 / 16	46 / 18
42 / 6	43 / 8	42 / 10	44 / 12	45 / 14	44 / 16	
45 / 6	46 / 8	45 / 10	47 / 12	49 / 14	47 / 16	
48 / 6	49 / 8	48 / 10	51 / 12			
51 / 6	52 / 8	51 / 10				
54 / 6						



Danbury Winair
Sheet Metal Fabrication
(203)885-0627
558 Federal Rd, Brookfield, CT 06804
Place order at sheetmetal@mywinair.com

All Spiral Estimation is based on:

4" Ø to 18" Ø	Gasketed
20" Ø and Above	Accuflange

Gauge:

4" Ø to 10" Ø	26g
12" Ø to 18" Ø	24g
20" Ø to 30" Ø	22g

SAFETY DATA SHEET

SECTION 1 - IDENTIFICATION

Manufacturer's name and address:



K-FLEX USA
100 Nomaco Dr
Youngsville, NC 27596
USA

Supplier's name and address:

Refer to Manufacturer

Telephone No. : (800) 765-6475
Website Address : www.kflexusa.com
Product Identifier : K-FLEX Elastomeric Foam; K-FLEX INSUL-TUBE, K-FLEX INSUL-SHEET, K-FLEX INSUL-LOCK, K-FLEX INSUL-LOCK SEAM SEAL K-FLEX ECO, K-FLEX DUCT LINER GRAY, K-FIT, K-TEK K 41-E, ELASTOMERIC TAPE
Chemical Name : NBR/PVC Elastomeric Foam
Recommended Use : This product is classified as an "article" according to Title 29 of the Code of Federal Regulations, OSHA Part 1910.1200C.

SECTION 2 – HAZARD(S) IDENTIFICATION

Hazardous Ingredient : None

SECTION 3 – COMPOSITION/INFORMATION OF INGREDIENTS

Description : Elastomeric closed-cell foam comprised of nitrile butadiene rubber/polyvinyl chloride (NBR/PVC). Available in rolls and sheets of various dimensions.

SECTION 4 – FIRST-AID MEASURES

Inhalation : Unlikely route of exposure. No measures established.
Skin Contact : If rash or irritation develops, wash with soap and water. If rash or irritation persists, consult a physician.
Eye Contact : Small particles may cause irritation. Flush with water. If irritation persists, consult a physician.
Ingestion : Unlikely route of exposure. No adverse effects anticipated.

SECTION 5 – FIRE-FIGHTING MEASURES

Extinguishing Media	: Water, CO ₂ , Dry Chemical, Foam
Special Firefighting Procedures	: Recommend NIOSH/MSHA approved self-contained breathing apparatus and full protective clothing be worn.
Decomposition Products	: Upon combustion, HCl, HCN, and other hazardous gases may be evolved.

SECTION 6 – ACCIDENTAL RELEASE MEASURES

Personal Precautions	: Recommend light to medium duty cloth or leather gloves and approved safety glasses.
Emergency Procedures	: None.

SECTION 7 – HANDLING AND STORAGE

Hints for Safe Handling	: None.
Hints for Fire and Explosion Protection	: None.
Hints for Separation of Incompatible Materials	: None.
Storage Recommendations	: Avoid storage in confined areas where temperatures may exceed 51°C (125°F).

SECTION 8 – EXPOSURE CONTROLS/PERSONAL PROTECTION

Medical Conditions Aggravated by Exposure	: Not established.
Codes Used	: N/A
General Health Measures	: N/A
Engineering Controls	: Local exhaust ventilation is recommended for control of airborne dust, fumes, and vapors in confined areas.

SECTION 9 – PHYSICAL AND CHEMICAL PROPERTIES

Appearance	: Sheets, rolls, and tubes; some with self-adhesive
Color	: Black, white, or gray.
Odor	: Negligible to no odor.
Melting Point	: N/A
Boiling Point	: N/A
Lower Explosion Limit	: N/A
Upper Explosion Limit	: N/A
Vapor Pressure @ 20°C	: 0.1

Vapor Density (Air = 1) : N/A
Solubility : Insoluble
Specific Gravity (H₂O = 1) : N/A
Flash Point : N/A

SECTION 10 – STABILITY AND REACTIVITY

Stability : Stable.
Incompatibility : N/A
Decomposition Products : Upon combustion, HCl, HCN, and other hazardous gases may be evolved.

SECTION 11 – TOXICOLOGICAL INFORMATION

Effects on short- and long-term Exposure : When used and handled according to specification, the product does not have any harmful effect to the best of our knowledge.

SECTION 12 – ECOLOGICAL INFORMATION

Classified as non-hazardous to waters.

SECTION 13 – DISPOSAL CONSIDERATIONS

Disposal : Not a RCRA hazardous waste. Dispose of in accordance with local, state, and federal regulations.

SECTION 14 – TRANSPORT INFORMATION

No hazardous materials.

SECTION 15 – REGULATORY INFORMATION

N/A

SECTION 16 – OTHER INFORMATION

Revised January, 2015. The information and recommendations contained herein are based upon data that is accurate and reliable, to the best of K-FLEX USA, LLC knowledge and belief. With respect to information and recommendations, K-FLEX USA, LLC makes no representations or warranties of any kind or nature, expressed or implied.

S A F E T Y D A T A S H E E T

Water Based Liner Adhesive

Page 1

SECTION I - PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: Water Based Liner Adhesive
MANUFACTURERS' ADDRESS: Elgen Manufacturing Company INC.
10 Railroad Ave, Closter NJ 07624
EMERGENCY PHONE: INFOTRAC: (800) 535-5053
BUSINESS HOURS: 6AM - 6PM
REVISION DATE: 04/01/2016
INFORMATION PHONE: (800)503-9805
REVISION #: 3-15
PREPARED BY: IT Department. Supersedes all previous
DOT HAZARD CLASS: Not Hazardous - UN Number: N/A

SECTION II - HAZARDOUS INGREDIENTS / SARA III INFORMATION

HMIS Ratings: Health: 1 Flammability: 0 Reactivity: 0 Personal Protective Equipment: B

REPORTABLE COMPONENTS

CAS NUMBER

Weight %

None

SECTION III – COMPOSITION/INFORMATION ON INGREDIENTS

PROPRIETARY COMPONENT

Trade Secret

CAS NUMBER

Proprietary Blend

CONCENTRATION

SECTION IV – FIRST AID MEASURES

INHALATION: Remove to fresh air. If breathing is difficult, administer oxygen. If breathing has stopped, administer artificial respiration. Contact physician or emergency medical facility immediately.

SKIN: Remove contaminated clothing and shoes. Wash exposed area thoroughly with soap and water for at least 15 minutes. Do not rub affected area. If irritation persists, get medical attention. Skin reaction may take 24 to 48 hours to develop. Wash contaminated clothing before reuse.

EYES: Immediately flush eyes with large amounts of water for at least 15 minutes while frequently lifting the upper and lower eyelids. If irritation persists, call a physician.

INGESTION: Do not induce vomiting. Contact physician or emergency medical facility immediately. Never give anything by mouth to an unconscious person.

SECTION V - FIRE-FIGHTING MEASURES

FLASH POINT None

FIRE AND EXPLOSION HAZARD Closed containers exposed to extreme heat may rupture due to pressure build up

EXTINGUISHING MEDIA The product will only burn after the water it contains is driven off. For dried film use water, foam, carbon dioxide or dry chemical.

FIRE FIGHTING INSTRUCTIONS Water may be used to cool exposed containers.

SECTION VI – ACCIDENTAL RELEASE MEASURES

SPILL CLEANUP: Dike, contain, or absorb with inert absorbent material. Collect spilled material in a salvage container. Prevent spill from entering sewers, drains, streams, waterways, or other bodies of water.

ACCIDENTAL RELEASE MEASURES: Dispose of in accordance with all local, state and federal regulations.

SECTION VII – HANDLING AND STORAGE

HANDLING: DO NOT ALLOW TO FREEZE. Store in a cool dry location away from heat. Keep containers tightly closed and store with adequate ventilation.

OTHER PRECAUTIONS: DO NOT TAKE INTERNALLY. Avoid inhalation of excess vapors, ingestion, and unnecessary, prolonged, or repeated contact with this and any other chemical. Change soiled work clothes frequently. Clean hands after handling. KEEP OUT OF REACH OF CHILDREN.

STORAGE: Keep in a dry, cool place, protect material from freezing.

S A F E T Y D A T A S H E E T

Water Based Liner Adhesive

Page 2

SECTION VIII – EXPOSURE CONTROLS/PERSONAL PROTECTION

- ENGINEERING CONTROLS :** Use only in area provided with appropriate exhaust ventilation.
- EYE PROTECTION :** Use chemical splash goggles or OSHA permitted safety glasses.
- SKIN PROTECTION :** Protection gloves
- RESPIRATORY PROTECTION :** Not required under normal conditions. Provide sufficient ventilation to maintain constant fresh air in workspace. If TLV is exceeded, use NIOSH/MSHA approved organic vapor and mist, supplied air, or self-contained breathing apparatus. Avoid breathing sanding dust.

SECTION IX - PHYSICAL / CHEMICAL PROPERTIES

FORM	Mobile Liquid	SPECIFIC GRAVITY	(H ₂ O=1) 1.1-1.2
COLOR	White or Black	BOILING POINT	212°F
ODOR	Mild, Sweet	PH	8.0-9.5
SOLUBILITY IN WATER	Miscible	PERCENT VOLATILE BY WEIGHT	55-65%
COATING V.O.C.	22 g/l	VISCOSITY (CPS)	approx. 2,000-3,500
WATER SOLUBILITY	Soluble	FREEZING POINT	32°F(0°C)

SECTION X – STABILITY AND REACTIVITY DATA

- CONDITIONS TO AVOID :** Coagulation may occur after freezing, thawing, or boiling.
- INCOMPATIBILITY :** Metal salts, mineral acids (i.e. sulfuric, phosphoric, etc.) Strong oxidizing agents. Strong reducing agents.
- DECOMPOSITION :** May form toxic materials on thermal decomposition including Carbon monoxide (CO), Carbon dioxide (CO₂), and various hydrocarbons. Under fire conditions, this product will release hydrogen chloride gas.
- POLYMERIZATION :** Polymerization will not occur.
- STABILITY :** Stable at ambient temperatures.

SECTION XI – TOXICOLOGICAL INFORMATION

- SKIN :** Prolonged and repeated contact with product may cause skin irritation.
- EYES :** Direct contact, may cause irritation.
- INHALATION :** Adverse health effects from vapors or spray mists in poorly ventilated areas may include irritation of the mucous membranes of the nose, throat, and respiratory tract and symptoms of headache and nausea.

SECTION XII – ECOLOGICAL INFORMATION

- ECOTOXICITY:** No ecotoxicity data was found for the product
- ENVIRONMENTAL FATE:** No environmental information found for this product

SECTION XIII – DISPOSAL CONSIDERATIONS

Consult with the US EPA Guidelines listed in 40 CFR Part 261.3 for the classifications of hazardous waste prior to disposal. Furthermore, consult with your state and local waste requirements or guidelines, if applicable, to ensure compliance. Arrange disposal in accordance to the EPA and/or state and local guidelines.

S A F E T Y D A T A S H E E T

Water Based Liner Adhesive

Page 3

SECTION XIV – TRANSPORT INFORMATION

DOT HAZARD CLASS	Not Hazardous
UN NUMBER	N/A
PACKING GROUP	N/A
SHIPPING NAME	N/A

SECTION XV –REGULATORY INFORMATION

This product is considered non-hazardous under the OSHA Hazard Communication Standard 29 CFR 1910.1200.

EMERGENCY PLANNING AND COMMUNITY RIGHT-TO-KNOW (SARA TITLE III):

Section 311/312 Categorizations (40 CFR 370): Immediate (Acute) Health Hazard.

Section 313 Information (40 CFR 372) – Toxic Chemicals List: This product contains the following substances subject to the reporting requirements of Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 and 40 CFR 372:Component: none. Toxic Substances Control Act (TSCA): All components of this product are on the TSCA Inventory or are exempt from TSCA Inventory requirements.

CALIFORNIA PROPOSITION 65 (Safe Drinking Water and Toxic Enforcement Act of 1986): None listed.

SECTION XVI –OTHER INFORMATION

CREATION DATE	06/10/2009
REVISION DATE	06/01/2016
REVISION NOTE	SDS - 16 Section
AUTHOR	IT Department

All the information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall Elgen Manufacturing be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if Elgen Manufacturing has been advised of the possibility of such damages.

WATER-BASED LINER ADHESIVE



Product Data Sheet



Description

Elgen's Water - Based Liner Adhesive is an economical, water-based product for bonding insulation to metal surfaces. A non-oxidizing vinyl copolymer adhesive with excellent temperature and moisture resistance after curing, it forms a durable bond that will not become brittle with age.

Standard Construction

Properties	Value
Composition	A high solids, water base adhesive that is non-flammable when wet.
Color	White/Black
Viscosity	2000 to 3000 cps
Solids Content	37% ± 2%
Weight per Gallon	10.0 ± 0.1 #/gallon
Drying time	Tack-free: 3 to 4 hours (depending on humidity and temperature) Complete drying: 2 to 3 days at room temperature
Application and storage	KEEP FROM FREEZING 50°F TO 100°F Store and ship at temperatures above 32°F. Use within 6 months after receipt.
Service temperature	0°F to 180°F
Flammability	Wet - Non-flammable. Dry - Slow burning.
Clean-up	Thin with water. Clean up when wet with warm water. Dry clean up with aromatic or chlorinated solvents.

Features

This adhesive can be sprayed, brushed, or rolled and is designed for both manual and automatic applications. It provides excellent results with easy cleanup. Our duct liner adhesive contains antimicrobial agents that remain effective after the adhesive has cured.

Non-flammable, no unpleasant odors or hazardous fumes. Safe to use in enclosed areas.

Easy clean up with warm water

Good wet-tack

Fast drying with high tack.

Excellent coverage.

Contains zero VOC (volatile organic compounds).

Meet Requirements For Iowa Precision Coil Lines.

LEED Compliant

Meets requirements of NFPA 90A & 90B

Meets requirements of ASTM C-916

Packaging

5 Gallon Pails
52 Gallon Drums

Guarantee

All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing


10 Railroad Ave, Closter NJ 07624

Tel: 800.503.9805 :: Fax: 201.964.9030

info@elgenmfg.com :: www.elgenmfg.com



K-FLEX DUCT® LINER GRAY

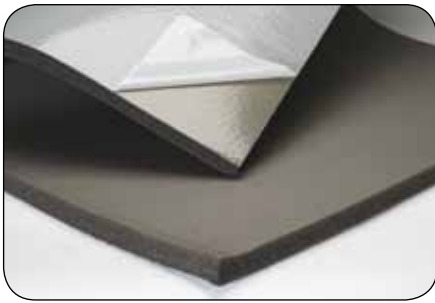

Flexible, Closed Cell Elastomeric Foam Insulation
Responsive to Market
Industry & Product Expertise
3rd Party Certified Products
25/50-rated up to 2" thick
Systems Approach
Factory-applied Options
14 Production Facilities Worldwide






DUCT LINER BENEFITS

A key design objective of modern residential, commercial and industrial facilities is to incorporate a concern for energy consumption, as well as occupant comfort and safety. A healthier, more productive and more attractive environment depends in large part on well-designed and properly-insulated HVAC duct systems, which carry air to conditioned spaces inhabited by people,

sensitive equipment, or a combination of both.

The advent of enhanced Indoor Air Quality (IAQ) has influenced engineers to 1) keep interior ducts free of foreign materials that bring fibers into the air stream, absorb moisture, or support mold growth, and 2) address sound reduction mechanically through deflection and

other methods. However, not using interior insulation results in increased transferred noise, energy loss, and higher cost solutions. Using a fiber-free, closed cell elastomeric liner provides a solution for all of these issues.

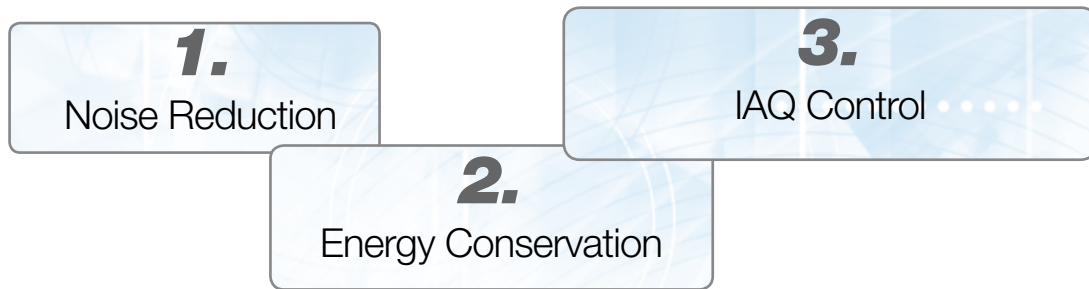

TECHNICAL PROPERTIES

COMPARISON BETWEEN MATERIALS

	K-FLEX Duct® Liner Gray Closed Cell Elastomeric	Fibrous	Semi-Closed Cell Elastomeric
Closed Cell Structure	Yes	No	No
Flexible	Yes	Yes	Yes
Thermal k (75°F mean)	0.25	0.23	0.25
water vapor transmission (wvt) without jacketing (perm-in)	<0.06	25.00	Info not available
25/50 flammability rating	Yes (2")	Yes	Yes (1")
Service Temperature (°F)	-297°F to +220°F	0°F to +250°F	-297°F to + 180°F
Density (pcf)	3 - 4	1.5 - 3	3 - 6
Available with PSA	Yes	No	No
Fiber-free	Yes	No	Yes
Non-porous	Yes	No	No
Resists Dirt Accumulation	Yes	No	Yes
NRC Value (1")	0.50	0.75	0.60

NOISE REDUCTION

Effective noise reduction in ducts requires an integrated strategy of good mechanical layout, vibration isolation and insulation with noise absorbing properties. Acoustic performance can be categorized into two functions: noise reduction (absorption) and sound barrier. For duct lining applications, the primary acoustical goal of the insulation is to achieve noise reduction through the absorption of sound waves and the subsequent conversion of sound energy into heat. The insulation absorbs noise from the air handler (fan) and room, and prevents it from traveling down the duct and exiting at the vent openings.

Noise reduction, quantified by the Noise Reduction Coefficient (NRC), measures the percentage of sound absorption in a reverberation room by


determining noise decay rate. K-FLEX Duct® Liner Gray outperforms fibrous, and is comparable to semi-closed cell elastomeric, in absorbing noise at low frequencies associated with equipment rumble (125 - 500 Hz), which is the #1 target for acoustical treatment. Noise from higher frequencies, i.e. high pitched screeching, is the result of a mechanical problem downstream and is not usually a consideration.

Sound barriers, quantified by the Sound Transmission Loss (STL), reduce the amount of noise that pass through an area being by reflecting the sound waves back to its source. STL values are defined as the difference in decibels (dB) between the average sound pressure levels in the source and receiving rooms before and after acoustic treatment

which are then used to determine the Sound Transmission Class (STC) of the product. Sound barrier properties are generally related to the mass of the material in that the higher the mass, the higher (better) the STC value. In the case of metal air ducts, the metal duct itself is a good barrier material and the insulation is not a major contributor as a sound barrier. When STC values are given for duct lining materials, they are often tested as a composite (insulation and metal together) as this provides a more accurate measure of the STL of the application and if the insulation were tested by itself, it would not provide a very high value. It should be noted however, that insulation, when adhered to the duct will reduce noise created by vibration from the duct.

Sound Performance Comparison

- K-FLEX DUCT® LINER GRAY
- Fiberglass
- Semi-Closed Cell Elastomeric

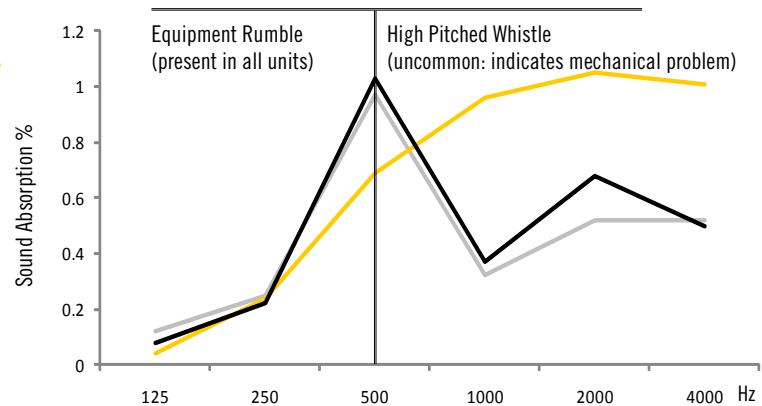

Sound Absorption	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
1" K-FLEX Duct® Liner Gray	0.12	0.25	0.97	0.32	0.52	0.52	0.50
1" Fibrous*	0.04	0.24	0.69	0.96	1.05	1.01	0.75
1" Semi-Closed Cell Elastomeric*	0.08	0.22	1.03	0.37	0.68	0.50	0.60

Sound Barrier**	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	STC
1.5" K-FLEX Duct® Liner Gray	12	10	13	14	22	31	16

*Taken from manufacturer's published data.

**Tested as insulation only. Testing conducted with insulation attached to metal would lead to high STC rating around 25.



ENERGY CONSERVATION

Thermal insulation is commonly used to reduce energy consumption of HVAC systems and equipment. If improper insulation is used, potential threats include heat loss through duct walls and moisture intrusion into the interior structure of the insulation. Since water is a very good conductor, the capability of an insulation material to slow water vapor from penetrating into its interior


structure is fundamental for the long-term efficiency of the application.

SMACNA allows 5% moisture intrusion for fiberglass liner, **BUT:** For every 1% moisture gain, the insulation effectiveness drops 7.5%. As indicated below, if the wvt of the insulation is less than 0.10 perm-in, there will be minimal long-term effects on the k-value.

	k-value (75°F mean)	wvt (perm-in) unjacketed
Closed Cell Elastomeric	0.25	0.05
Fibrous	0.23	25.00
Semi-Closed Cell Elastomeric	0.25	not published

Thermal k performance over time with moisture gain (10 years)


wvt (perm-in)	.01	.10	1.00
k-value (start)	.250	.250	.250
k-value (10 years)	.255	.310	1.88

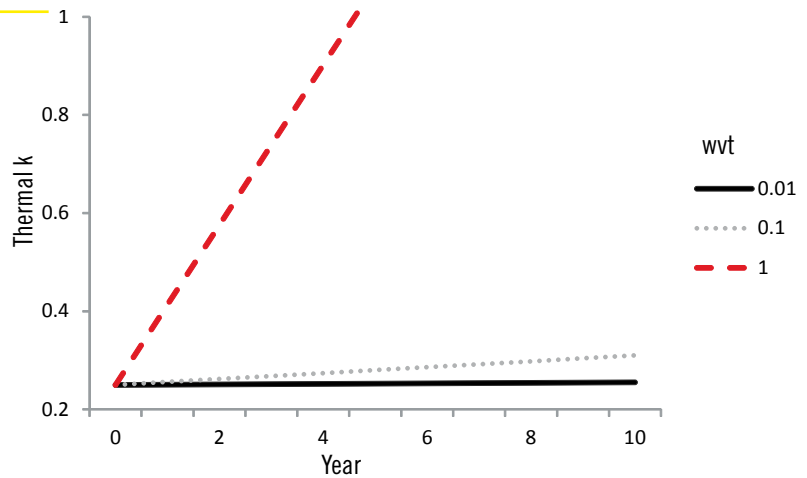

R value performance over time with moisture gain (10 years)

An R-value of 4.2 is required by IECC, ASHRAE and nearly every state building code.

wvt (perm-in)	.01	.10	1.00
R-value (start)	4.2	4.2	4.2
R-value (10 years)	4.12	3.15	0.55

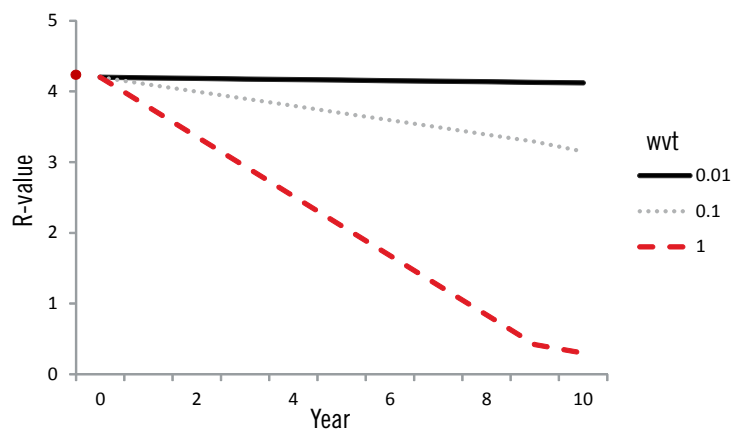

IAQ CONTROL MOLD RESISTANCE / LOW VOC / NON-FIBROUS

For an insulation material to defend against indoor air quality (IAQ) problems, it must resist condensation and moisture intrusion that can lead to mold, and ensure that the air passing over it does not contain fibers or dust. In ductwork that functions using conditioned air, the formation of condensation on the surface of the insulating material, within it, or on the outside of the metal is a negative factor.

Condensation forms as a result of the direct contact of warm humid air with a cold surface if the temperature of the surface is lower than the Dew Point of the humid air. The surface temperature of a duct and of the insulation depends on the application conditions and the R-value of the insulation material. If the insulation material is vapor permeable, moisture can move inside the insulation to reach areas where the temperature is


low enough to have condensation, even if the surface temperature of the insulation is high enough to prevent surface condensation. An insulation material with low wvt would prevent this situation from occurring.

K-FLEX Duct® Liner Gray has tested as being mold resistant to ASTM G 21 standards. This is a result of a closed cell structure that inherently resists moisture and wicking, an added anti-microbial agent, a smooth surface skin that resists dirt accumulation, and a fiber-free composition that makes it non-particulating and non-eroding. K-FLEX Duct® Liner Gray is **GREENGUARD® certified** as a low VOC material, meeting the requirements for the “*Children & Schools*” and “*Indoor Air Quality*” classifications.


In contrast, fibrous or open cell materials rely on a concentrated moisture vapor barrier (foil jacket or surface-applied coating). If the barrier is damaged (even a pinhole) or the edges are not properly sealed, they are susceptible to moisture intrusion and subsequent mold growth. Once moisture penetrates, it can wick and involve large areas in the mold growth process. The *EPA & NAIMA* recommend the immediate removal of wet fiberglass to prevent mold, which means additional costs.

A study published in the April 2004 issue of *ASHRAE Journal* showed that an inspection of 150 office buildings with fiberglass duct liner revealed that 92% of them had fungal growth. Semi-closed cell elastomeric insulation would also be susceptible to moisture intrusion. Often times, the insulation can have moisture issues before the building is enclosed or commissioned.

Winter: Cold air outside duct, warm air inside duct

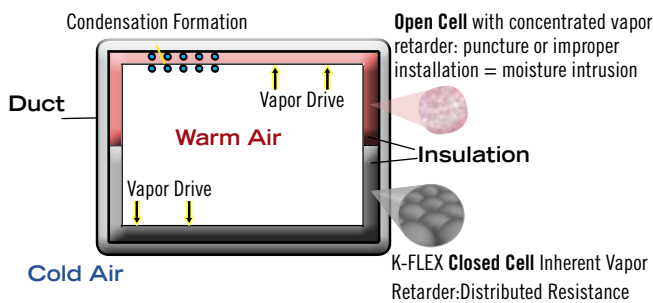

Summer: Warm air outside duct, cold air inside duct

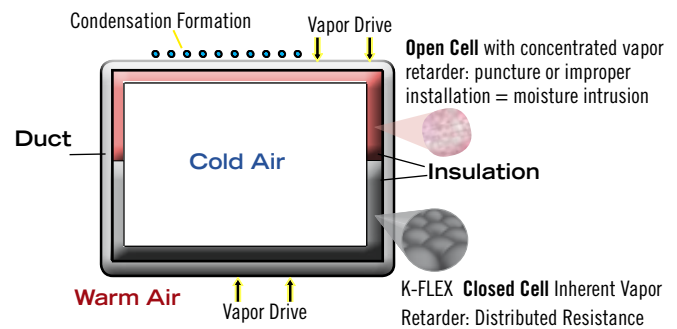

Result w/ Fibrous: Mold growth on insulation



Result w/ Fibrous: Mold growth on ceiling from water drip (corrosion on duct also possible)






PERFORMANCE

- **Reliable:** Excellent thermal k after 10 years
- **Temperature Range:** -297°F to +220°F
- **Low perm (<0.06 perm-in) without jacketing = No vapor barrier facing / edge treatment needed**
- **Available with or without factory-applied PSA**
- **Inherently high mold & mildew resistance**
- **Fiber-free & Low VOC = IAQ**
- **GREENGUARD® Certified - Children & Schools™ Classification for low VOC & Microbial Resistance Listing**
- **Contains an EPA-registered antimicrobial agent for added protection**
- **No erosion, cracking or delamination at high velocity air flow rates**
- **Low pressure loss (values comparable to fiberglass)****
- **Sustainable:** Lasts the life of the system

PROPERTY	RATING	CRITERIA
NRC 1"	0.50	ASTM C 423
STC 1.5" (insulation only)	16	ASTM E 90
wvp	<0.06 perm-in	ASTM E 96
Water Absorption	<.2%	ASTM C 209
Thermal k	0.25 (Btu-in/h-ft ² -°F)	ASTM C 177 & C 518
R-value	1" = 4.2, 2" = 8	
Fire Rating	25/50 up to 2" thick Pass	ASTM E 84 NFPA 90 A / 90 B
Air Erosion	Pass up to 10,000 fpm	UL 181
Mold	Pass	ASTM G 21
Energy Rating	Complies	ASHRAE 90.1
Elastomeric Duct Lining Requirements	Pass	ASTM C 1534

**PRESSURE LOSS (H₂O/100 ft): K-FLEX DUCT® LINER GRAY vs. Fiberglass			
Velocity (ft/m)	10" x 10"	16" x 16"	24" x 24"
1000	.311 / .207	.102 / .114	.052 / .068
2000	1.007 / .806	.377 / .443	.207 / .266
3000	2.021 / 1.797	.799 / .988	.473 / .594
4000	3.467 / 3.179	1.386 / 1.748	.849 / 1.050

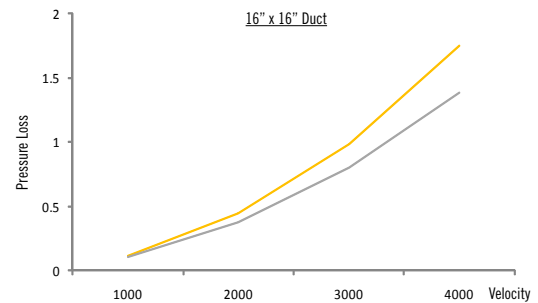

SPECIFICATION COMPLIANCE

- ASTM C534 Type 2 (Sheet), Grade 1
- ASTM C1534
- ASTM D1056-00-2C1
- ASTM C423/E795 NRC=0.50 at 1" thickness
- New York City MEA 186-86-M Vol. V
- USDA & RoHS Compliant
- UL 94-5V Flammability Classification (Recognition No. E300774)
- ASTM E84: 25/50 at 2" and below
- Meets requirements of NFPA 90A Sect. 2.3.3 for Supplementary Materials for Air Distribution Systems up to 2" thickness
- Meets requirements of UL 181 Sections 11.0 and 16.0 (Mold Growth/Air Erosion)
- Meets requirements of ASTM C411 (Test Method for Hot Surface Performance of High Temperature Thermal Insulation)
- GREENGUARD certified under the "Children & Schools" and "Indoor Air Quality" classifications

INSTALLATION & MAINTENANCE

- No Double Wall required to prevent air erosion or airborne fibers
On average, double wall is 60% more expensive than single wall
No need to wrap in mylar
No need to finish (seal) exposed edges
- Easy to fabricate & install (use SMACNA guidelines)
No issues using weld pins or impact-applied fasteners (K-FLEX recommends pins & adhesives to fasten liner to metal)
Easy to cut manually or with an automated machine
Works well with automated, semi-automated, and handheld equipment
- Flexible: non-rigid, non-breakable
- No protective clothing required during installation
- Safe: Non-dusting, Non-wicking, Non-abrasive, Non-itching
- Low Maintenance
- Easy to Clean – Smooth and Durable Surface, Resists Tearing
- Available with factory-applied pressure sensitive adhesive (PSA)




PROJECT REFERENCE LIST

- Bellefonte High School, Pennsylvania
- City Of Doral Courthouse, Florida
- Washington State University Veterinary Science Building, Washington
- Finn Hill School, Washington
- Allegheny College, Pennsylvania
- Pine Richland High School, Pennsylvania
- Taunton Courthouse, Massachusetts
- University of Massachusetts, Massachusetts
- Massachusetts Department of Transportation, Massachusetts
- Kelowna General Hospital, British Columbia, Canada
- Bloomsburg University, Pennsylvania
- Woodward Elementary School, British Columbia





K-FLEX USA
INNOVATION IN INSULATION

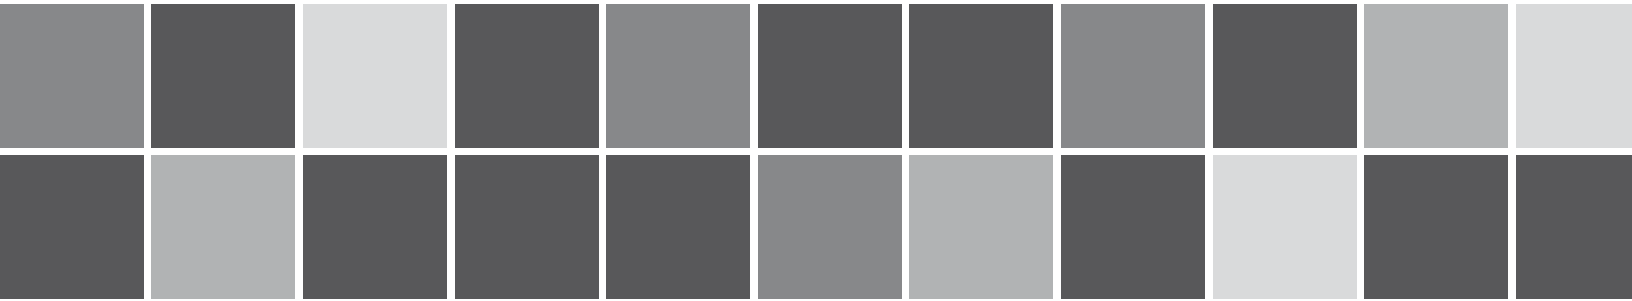


K-FLEX USA
INNOVATION IN INSULATION

www.kflexusa.com
tel. 800-765-6475 - fax: 800-765-6471
100 Nomaco Drive
Youngsville, NC 27596

TWO WAY GRIPPER



Product Data Sheet

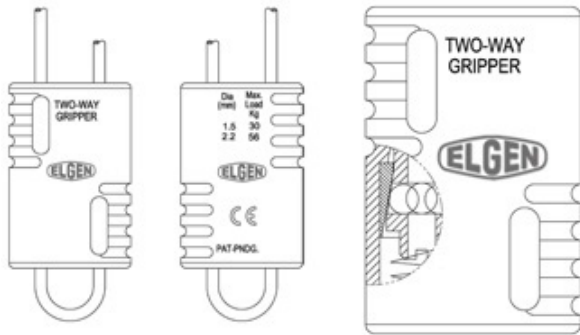

Description

Elgen's Two Way Gripper is a steel cable hanging system. It is intended to add a simpler way of suspending ductwork. With it's 5 to 1 safety factor and ease of use, the Two Way Gripper is the ideal hanging system for both the contractor and building owner.

Standard Construction

Size	Wire Rope	Working Load	Configuration
TWG 125	WR 10	125 lbs	7x7
TWG 250	WR 20	250 lbs	7x7
TWG 650	WR 30	650 lbs	7x19

CAUTION

- * Never exceed the suggested working load weight limit
- * Do not apply any lubricants or paint to wire or unit itself
- * Do not install wire over abrasive edges or surfaces
- * Do not use in corrosive environments

***Consult with your local Elgen Representative for any concerns

Features

- ASTM E8 & A370 Approved
- Complies with SMACNA Upper and Lower attachment standards if used in strict accordance with manufacturer's installation instructions
- 5 to 1 Safety Factor
- Open Bore for ease of use
- Extra hanging configurations and angles
- Effortless hand adjustment
- Extra wire holes provide clean aesthetics

Construction

- Unit Body - Zinc (z-3)
- Inner components - Steel
- Wire - Electro galvanized steel

Packaging

Size	Pcs Per Bag	Pcs Per Bkt	Bkts Per Pallet
TWG 125	10	500	48
TWG 250	10	400	48
TWG 650	4	120	36

Wire Rope	Used With	Length	Configuration
WR 10	TWG 125	500'	7x7
WR 20	TWG 250	500'	7x7
WR 30	TWG 650	500'	7x19

WIRE ROPE WITH FIXED 3" LOOP

WR10310	TWG 125	10'	7x7
WR10315	TWG 125	15'	7x7
WR10330	TWG 125	30'	7x7
WR20310	TWG 250	10'	7x7
WR20315	TWG 250	15'	7x7
WR20330	TWG 250	30'	7x7

Guarantee


All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing
 10 Railroad Ave, Closter NJ 07624
 Tel: 800.503.9805 :: Fax: 201.964.9030
 info@elgenmfg.com :: www.elgenmfg.com

Carriage Bolt



Product Data Sheet

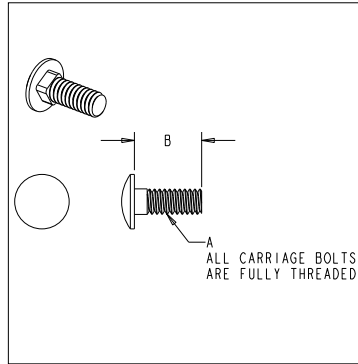

Features

Material Meets ASTM A307 Grade A.
Zinc Plating meets ASTM F1941 FeZn3A
Typical Hardness: HRB 69-100
Tensile Strength: 60,000 PSI (4650 lbs) Min
Length Tolerances (up to and including 1"): +0.02/-0.03

Description

Elgen's Carriage Bolt is used in conjunction with all 4-bolt Flange systems.

Optional Construction

Stainless Steel 304
Stainless Steel 316
Aluminum

Standard Construction

Made from Low Carbon steel - ASTM A307 - Grade A.

Size (in)	A (in)	B (in)
3/8 x 1	3/8	1
3/8 x 1-1/4	3/8	1-1/4

Packaging

Item	Size (in)	Box Qty	Skid Qty
Carriage Bolt	3/8 x 1	1,000	36,000
Carriage Bolt	3/8 x 1-1/4	1,000	36,000

Guarantee


All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing
10 Railroad Ave, Closter NJ 07624
Tel: 800.503.9805 :: Fax: 201.964.9030
info@elgenmfg.com :: www.elgenmfg.com

E-55 Cleat



Product Data Sheet

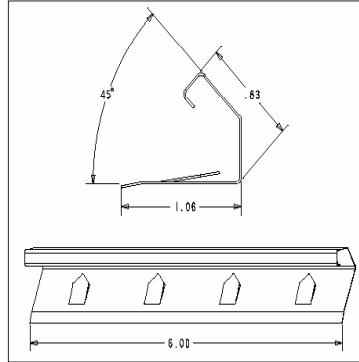

Features

- Four "Teeth" provides a secure lock
- Easy to install (no tool needed)
- Meets SMACNA requirements (6" Length)
- Union Made
- Works with C, F, J Flange, and Elgen Flange

Description

Elgen's E-55 Cleat is compatible on all flange systems except H. The E-55 Cleat is used on the perimeter of the Flange, four bolt rectangular system. The use of the E-55 Cleat provides uniform compression for the 440 Butyl Gasket between the Flange's for an energy efficient seal.

Optional Construction

- Stainless Steel 304
- Stainless Steel 316
- Aluminum
- PCD
- Galvanneal (Paint Grip)

Standard Construction

Stamped from 22 and 20 Ga ASTM A-653 G60 material

Weight(per box)(22 GA): 28 lbs

Weight(per box)(20 GA): 34 lbs

Packaging

Gauge	Box Qty	Skid Qty
22	250	24,000
20	250	24,000

Guarantee

All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing

10 Railroad Ave, Closter NJ 07624


Tel: 800.503.9805 :: Fax: 201.964.9030

info@elgenmfg.com :: www.elgenmfg.com

Conduit Inserts



Product Data Sheet

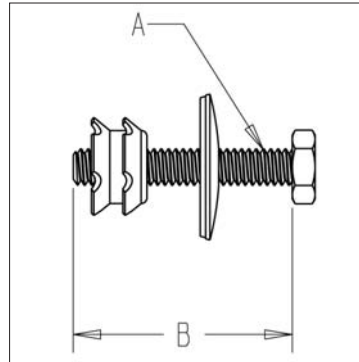

Features

Rf. SMACNA HVAC Duct Construction Standards, PG 1-29 FIG. 1 - 2, Fig "B"
Neoprene/Metal washer to create airtight seal

Optional Construction

Stainless Steel 304
Stainless Steel 316

Description

Elgen's Conduit Inserts are used in conjunction with metal EMT or conduit to provide internal rectangular duct support.

Please see Elgen's Rectangular Duct Construction Standards with use of Conduit inserts for selection of appropriate size.

Standard Construction

1/2" and 3/4":

1/2" conduit (for duct up to 36" in width)
3/4" conduit (for duct over 36" in width)

Hex Head Bolt- 1/4-20 x 1-1/4" Grade 2 zinc plated steel

1/4" Flat washer with neoprene gasket
1/4" "Star" Nut

1-1/4" and 1-1/2":

Hex Head Bolt- 5/16-20 x 2" Grade 2 zinc plated steel

5/16" Flat washer with neoprene gasket
5/16" "Star" Nut

Testing Results

Pull Out Test		
Tube Connector	Load to 1/16" Pull Out	Load to Failure
1/2"	1500 - 2000	2000 - 2200
3/4"	1900 - 2400	2300 - 2600

Torque Test	
Tube Connector	Maximum Torque
1/2"	70 in - lbs (nut spins)
3/4"	70 in - lbs (nut spins)

Packaging

Size A	Length B	Box Qty	Weight (lbs)
1/4"	1-1/4"	1,000	45
5/16"	2"	1,000	55

Warranty

All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing
10 Railroad Ave, Closter NJ 07624
Tel: 800.503.9805 :: Fax: 201.964.9030
info@elgenmfg.com :: www.elgenmfg.com

SHRINK WRAP with PSA



Product Data Sheet



Description

Elgen's Shrink Wrap with PSA is a polyethylene film with adhesive. Elgen's Shrink Wrap with PSA is used as an alternative to a polyethylene film that is secured to the duct wall with tape.

Elgen's Shrink Wrap with PSA is used on any exposed sections of the duct work. It prevents outside debris from entering the ductwork and contaminating the duct work.

Standard Construction

Designed to adhere to the following metals:

Galvanized, stainless steel, aluminum, aluminized, galvaneal (paint grip), PCD coated, black iron.

Thickness (mil)	Minimum Elongation (%)
2	400
3	600
4.5	800

Features

- No need to tape
- No loose ends flapping
- The product is easy to put on and easy to take off
- Does not leave any residue
- Resists tearing due to its high rubber content
- No VOC's - Meets LEEDS® Requirements
- UV Resistant
- Waterproof

Optional Construction

Available Roll Sizes:

2' - 3' - 4' - 5'

Available Thickness:

2mil - 3mil - 4.5 mil

Available Colors:

Blue - Clear - Black - Green - Orange - Red - Brown - Purple - Yellow

Packaging

Roll Sizes (ft)	Length per Roll (ft)	Skid Qty (roll)
2	200	300
3	200	200
4	200	150
5	200	125

Guarantee

All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing

10 Railroad Ave, Closter NJ 07624

Tel: 800.503.9805 :: Fax: 201.964.9030

info@elgenmfg.com :: www.elgenmfg.com

Product Data Sheet



Description

A top quality, water based, high pressure/high velocity duct sealant for commercial and residential ductwork.

Features

LEED® V4 Qualified

- Qualifies for LEED® Credit
- Very User Friendly
- Resists Mold and Mildew
- For Outdoor and Indoor Use
- Does Not Drip and Sag
- Noncombustible
- Nonflammable
- Paintable
- Tested in accordance with and meets requirements of NFPA 90A & 90B
- Meets Requirements of UL 723
- Meets Requirements of ASTM E-84(0 Flame/0 Smoke)
- Tested in accordance with UL-181
- When Dry, Adheres well to surface
- Almost No Shrinkage
- Excellent Resistance to Water and U.V.
- Resists Cracking and Peeling
- Made in the USA
- Union made Yellow Label
- Meets FDA Approval Requirements

Specifications

Properties	Value
Base	Water
Solid Content	70-75%
Application Temperature	40 °F - 110 °F
Freeze/Thaw Stability	5 cycles no deterioration (DPTM-20)
Flash Point	No flash to boiling
Clean Up	Use Warm water and soap - when wet
VOC	0 g/l
Pressure Classes	Meets all SMACNA pressure classes
Seal Classes	Meets all SMACNA seal classes
Cure Time	24-72 hours - depending on environment and application
Coverage	Dependent on application thickness - 75-110 sq. ft at 20-32 wet Mil
Chemical Family	Synthetic Latex
Viscosity	Approximately 200,000 - 300,000 cps
Storage	40 °F - 110 °F Do not freeze
Flammability	Non-flammable in wet or dry states
Shelf Life	24 months (unopened containers)
Shore A Hardness	Greater than 20
Max Static Pressure	15" WG
Substrate Applications	Metal, Flexible, PVC/Poly Coated Duct, and fiberglass ductboard

Packaging

Size (gallon)	Case Qty	Skid Qty
1/12	25	1600
1/2	8	200
1	4	240

Guarantee

All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing

10 Railroad Ave, Closter NJ 07624
Tel: 800.503.9805 :: Fax: 201.964.9030
info@elgenmfg.com :: www.elgenmfg.com

ELGEN DUCT SEAL-IT

Fiber Reinforced For Extra Strength



Product Data Sheet



Description

A top quality, water based, high pressure/high velocity duct sealant for commercial and residential ductwork.

Features

LEED® V4 Qualified

- Qualifies for LEED® Credit
- Very User Friendly
- Resists Mold and Mildew
- For Outdoor and Indoor Use
- Does Not Drip and Sag
- Noncombustible
- Nonflammable
- Paintable
- Tested in accordance with and meets requirements of NFPA 90A & 90B
- Meets Requirements of UL 723
- Meets Requirements of ASTM E-84 (0 Flame/0 Smoke)
- Tested in accordance with UL-181
- When Dry, Adheres well to surface
- Almost No Shrinkage
- Excellent Resistance to Water and U.V.
- Resists Cracking and Peeling
- Made in the USA
- Union made Yellow Label

Specifications

Properties	Value
Base	Water
Solid Content	70-75%
Application Temperature	40 °F - 110 °F
Freeze/Thaw Stability	5 cycles no deterioration (DPTM-20)
Flash Point	No flash to boiling
Clean Up	Use Warm water and soap - when wet
VOC	0 g/l
Pressure Classes	Meets all SMACNA pressure classes
Seal Classes	Meets all SMACNA seal classes
Cure Time	24-72 hours - depending on environment and application
Coverage	Dependent on application thickness - 75-110 sq. ft at 20-32 wet Mils
Chemical Family	Synthetic Latex
Viscosity	Approximately 200,000 - 300,000 cps
Storage	40 °F - 110 °F Do not freeze
Flammability	Non-flammable in wet or dry states
Shelf Life	24 months (unopened containers)
Shore A Hardness	Greater than 20
Max Static Pressure	15" WG
Substrate Applications	Metal, Flexible, PVC/Poly Coated Duct, and fiberglass ductboard

Packaging

Size (gallon)	Case Qty	Skid Qty
1/12	25	1600
1/2	8	200
1	4	240

Guarantee

All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing
 10 Railroad Ave, Closter NJ 07624
 Tel: 800.503.9805 :: Fax: 201.964.9030
 info@elgenmfg.com :: www.elgenmfg.com

SAFETY DATA SHEET

1. Identification

Product number 1000012946
Product identifier 14 OZ Elgen Manufacturing AE-88 BUTTER LT 12
Distributed by Elgen Manufacturing
10 Railroad Avenue
Closter, NJ 07624 United States
www.elgenmfg.com
Company phone General Assistance 201-964-0008
Emergency telephone US 1-866-836-8855
Emergency telephone outside US 1-952-852-4646
Version # 02
Recommended use ADHESIVE
Recommended restrictions None known.

2. Hazard(s) identification

Physical hazards Flammable aerosols Category 1
Health hazards Acute toxicity, inhalation Category 4
Skin corrosion/irritation Category 2
Serious eye damage/eye irritation Category 2A
Sensitization, skin Category 1
Germ cell mutagenicity Category 1B
Reproductive toxicity Category 1A
Specific target organ toxicity, single exposure Category 3 narcotic effects
Specific target organ toxicity, repeated exposure Category 2
Aspiration hazard Category 1
OSHA defined hazards Not classified.

Label elements



Signal word

Danger

Hazard statement

Extremely flammable aerosol. May be fatal if swallowed and enters airways. Causes skin irritation. Causes serious eye irritation. May cause drowsiness or dizziness. May damage fertility or the unborn child. May cause damage to organs through prolonged or repeated exposure.

Precautionary statement

Prevention

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Do not breathe gas. Wash thoroughly after handling. Use only outdoors or in a well-ventilated area. Wear protective gloves/protective clothing/eye protection/face protection.

Response

If swallowed: Immediately call a poison center/doctor. If on skin: Wash with plenty of water. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If exposed or concerned: Get medical advice/attention. Call a poison center/doctor if you feel unwell. Specific treatment (see this label). Do NOT induce vomiting. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse.

Storage	Store in a well-ventilated place. Keep container tightly closed. Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.
Disposal	Dispose of contents/container in accordance with local/regional/national/international regulations.
Hazard(s) not otherwise classified (HNOC)	None known.
Supplemental information	None.

3. Composition/information on ingredients

Mixtures

Chemical name	Common name and synonyms	CAS number	%
Propane		74-98-6	20 - 40
2-Methylpentane		107-83-5	10 - 20
Acetone		67-64-1	10 - 20
2,2-Dimethylbutane		75-83-2	2.5 - 10
2,3-Dimethylbutane		79-29-8	2.5 - 10
3-Methylpentane		96-14-0	2.5 - 10
Dimethyl Ether		115-10-6	2.5 - 10
Hydrocarbons, C9-unsaturated, Polymerized		71302-83-5	2.5 - 10
Toluene		108-88-3	2.5 - 10
Other components below reportable levels			10 - 20

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation	Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell.
Skin contact	Remove contaminated clothing. Wash off with soap and plenty of water. If skin irritation occurs: Get medical advice/attention.
Eye contact	Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical attention if irritation develops and persists.
Ingestion	Call a physician or poison control center immediately. Rinse mouth. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Aspiration may cause pulmonary edema and pneumonitis.
Most important symptoms/effects, acute and delayed	Irritation of eyes and mucous membranes. Prolonged exposure may cause chronic effects. May cause drowsiness or dizziness.
Indication of immediate medical attention and special treatment needed	Provide general supportive measures and treat symptomatically.
General information	Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. IF exposed or concerned: Get medical advice/attention. Wash contaminated clothing before reuse.

5. Fire-fighting measures

Suitable extinguishing media	Powder. Alcohol resistant foam. Water. Carbon dioxide (CO2).
Unsuitable extinguishing media	None known.
Specific hazards arising from the chemical	Contents under pressure. Pressurized container may explode when exposed to heat or flame.
Special protective equipment and precautions for firefighters	Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.
Fire fighting equipment/instructions	Move containers from fire area if you can do so without risk. Use water spray to cool unopened containers. Containers should be cooled with water to prevent vapor pressure build up. For massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out.

Specific methods Use standard firefighting procedures and consider the hazards of other involved materials. Move container from fire area if it can be done without risk. Cool containers exposed to flames with water until well after the fire is out. In the event of fire and/or explosion do not breathe fumes.

General fire hazards Extremely flammable aerosol.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Wear appropriate personal protective equipment. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up Refer to attached safety data sheets and/or instructions for use. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. Stop leak if you can do so without risk. Move the cylinder to a safe and open area if the leak is irreparable. Isolate area until gas has dispersed. Collect spillage. Prevent entry into waterways, sewer, basements or confined areas. Following product recovery, flush area with water. For waste disposal, see section 13 of the SDS.

Environmental precautions Avoid release to the environment. Contact local authorities in case of spillage to drain/aquatic environment. Prevent further leakage or spillage if safe to do so. Do not contaminate water. Avoid discharge into drains, water courses or onto the ground.

7. Handling and storage

Precautions for safe handling Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. All equipment used when handling the product must be grounded. Ground and bond containers when transferring material. Do not re-use empty containers. Do not breathe gas. Avoid contact with skin. Avoid contact with eyes. Avoid contact during pregnancy/while nursing. Avoid prolonged exposure. Use only in well-ventilated areas. Use personal protective equipment as required. Observe good industrial hygiene practices. When using, do not eat, drink or smoke. Wash hands thoroughly after handling. Do not empty into drains.

Conditions for safe storage, including any incompatibilities Store locked up. Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C/122 °F. Do not puncture, incinerate or crush. Do not handle or store near an open flame, heat or other sources of ignition. This material can accumulate static charge which may cause spark and become an ignition source. Refrigeration recommended. Store away from incompatible materials (see Section 10 of the SDS). Level 3 Aerosol.

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

Components	Type	Value
Acetone (CAS 67-64-1)	PEL	2400 mg/m3 1000 ppm
Propane (CAS 74-98-6)	PEL	1800 mg/m3 1000 ppm

US. OSHA Table Z-2 (29 CFR 1910.1000)

Components	Type	Value
Toluene (CAS 108-88-3)	Ceiling	300 ppm
	TWA	200 ppm

US. ACGIH Threshold Limit Values

Components	Type	Value
2,2-Dimethylbutane (CAS 75-83-2)	STEL	1000 ppm
	TWA	500 ppm
2,3-Dimethylbutane (CAS 79-29-8)	STEL	1000 ppm
	TWA	500 ppm
2-Methylpentane (CAS 107-83-5)	STEL	1000 ppm
	TWA	500 ppm

US. ACGIH Threshold Limit Values

Components	Type	Value
3-Methylpentane (CAS 96-14-0)	STEL	1000 ppm
Acetone (CAS 67-64-1)	TWA	500 ppm
	STEL	500 ppm
Toluene (CAS 108-88-3)	TWA	250 ppm
	TWA	20 ppm

US. NIOSH: Pocket Guide to Chemical Hazards

Components	Type	Value
Acetone (CAS 67-64-1)	TWA	590 mg/m3
		250 ppm
Propane (CAS 74-98-6)	TWA	1800 mg/m3
		1000 ppm
Toluene (CAS 108-88-3)	STEL	560 mg/m3
		150 ppm
	TWA	375 mg/m3
		100 ppm

US. Workplace Environmental Exposure Level (WEEL) Guides

Components	Type	Value
Dimethyl Ether (CAS 115-10-6)	TWA	1880 mg/m3
		1000 ppm

Biological limit values**ACGIH Biological Exposure Indices**

Components	Value	Determinant	Specimen	Sampling Time
Acetone (CAS 67-64-1)	25 mg/l	Acetone	Urine	*
Toluene (CAS 108-88-3)	0.3 mg/g	o-Cresol, with hydrolysis	Creatinine in urine	*
	0.03 mg/l	Toluene	Urine	*
	0.02 mg/l	Toluene	Blood	*

* - For sampling details, please see the source document.

Exposure guidelines**US - California OELs: Skin designation**

Toluene (CAS 108-88-3)

Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

Toluene (CAS 108-88-3)

Skin designation applies.

Appropriate engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Provide eyewash station.

Individual protection measures, such as personal protective equipment**Eye/face protection**

Wear eye/face protection. Wear safety glasses with side shields (or goggles).

Skin protection**Hand protection**

Wear protective gloves.

Other

Wear appropriate chemical resistant clothing.

Respiratory protection

If permissible levels are exceeded use NIOSH mechanical filter / organic vapor cartridge or an air-supplied respirator.

Thermal hazards

Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using, do not eat, drink or smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties**Appearance**

Physical state	Liquid.
Form	Aerosol.
Color	Not available.
Odor	Not available.
Odor threshold	Not available.
pH	Not available.
Melting point/freezing point	Not available.
Initial boiling point and boiling range	76.35 °F (24.64 °C) estimated
Flash point	-54.4 °F (-48.0 °C) estimated
Evaporation rate	Not available.
Flammability (solid, gas)	Not available.
Upper/lower flammability or explosive limits	
Flammability limit - lower (%)	2.2 % estimated
Flammability limit - upper (%)	9.5 % estimated
Explosive limit - lower (%)	Not available.
Explosive limit - upper (%)	Not available.
Vapor pressure	320.86 psig @70F estimated
Vapor density	Not available.
Relative density	0.533 g/cm3 estimated
Solubility(ies)	
Solubility (water)	Not available.
Partition coefficient (n-octanol/water)	Not available.
Auto-ignition temperature	662 °F (350 °C) estimated
Decomposition temperature	Not available.
Viscosity	Not available.
Other information	
Density	0.53 g/cm3 estimated
Flammability class	Flammable IA estimated
Heat of combustion	34.89 kJ/g estimated
Heat of combustion (NFPA 30B)	34.89 kJ/g estimated
Percent volatile	75.29 % estimated
Specific gravity	0.533 estimated
VOC (Weight %)	55.92 % estimated

10. Stability and reactivity

Reactivity	The product is stable and non-reactive under normal conditions of use, storage and transport.
Chemical stability	Material is stable under normal conditions.
Possibility of hazardous reactions	Hazardous polymerization does not occur.
Conditions to avoid	Avoid temperatures exceeding the flash point.
Incompatible materials	Strong oxidizing agents.
Hazardous decomposition products	No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation	May be fatal if swallowed and enters airways. Prolonged inhalation may be harmful. Narcotic effects. May cause damage to organs by inhalation.
-------------------	--

Skin contact Causes skin irritation.

Eye contact Causes serious eye irritation.

Ingestion May be fatal if swallowed and enters airways.

Symptoms related to the physical, chemical and toxicological characteristics Symptoms of overexposure may be headache, dizziness, tiredness, nausea and vomiting. Irritant effects.

Information on toxicological effects

Acute toxicity May be fatal if swallowed and enters airways. Narcotic effects.

Components	Species	Test Results
Acetone (CAS 67-64-1)		
<u>Acute</u>		
Dermal		
LD50	Guinea pig	> 7426 mg/kg, 24 Hours > 9.4 ml/kg, 24 Hours
	Rabbit	> 7426 mg/kg, 24 Hours > 9.4 ml/kg, 24 Hours
Inhalation		
LC50	Rat	55700 ppm, 3 Hours 132 mg/l, 3 Hours 50.1 mg/l
Oral		
LD50	Rat	5800 mg/kg 2.2 ml/kg
Dimethyl Ether (CAS 115-10-6)		
<u>Acute</u>		
Inhalation		
NOEL	Rat	2 ppm, 6 Hours
Oral		
LD50	Rat	460 mg/kg
Hydrocarbons, C9-unsaturated, Polymerized (CAS 71302-83-5)		
<u>Acute</u>		
Dermal		
LD50	Rat	> 2000 mg/kg, 24 Hours
Inhalation		
LC50	Rat	> 5.14 mg/l, 4 Hours
Oral		
LD50	Rat	> 16 ml/kg
Propane (CAS 74-98-6)		
<u>Acute</u>		
Inhalation		
LC50	Mouse	1237 mg/l, 120 Minutes 52 %, 120 Minutes
	Rat	1355 mg/l 658 mg/l/4h
Toluene (CAS 108-88-3)		
<u>Acute</u>		
Dermal		
LD50	Rabbit	> 5000 mg/kg, 24 Hours
Inhalation		
LC50	Mouse	6405 - 7436 ppm, 6 Hours

Components	Species	Test Results
		5320 ppm, 8 Hours
	Rat	5879 - 6281 ppm, 6 Hours
		25.7 mg/l, 4 Hours
Oral		
LD50	Rat	> 5000 mg/kg

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation	Causes skin irritation.
Serious eye damage/eye irritation	Causes serious eye irritation.
Respiratory or skin sensitization	
Respiratory sensitization	Not available.
Skin sensitization	This product is not expected to cause skin sensitization.
Germ cell mutagenicity	No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.
Carcinogenicity	Risk of cancer cannot be excluded with prolonged exposure.
IARC Monographs. Overall Evaluation of Carcinogenicity	
Toluene (CAS 108-88-3)	3 Not classifiable as to carcinogenicity to humans.
OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)	
Not listed.	
US. National Toxicology Program (NTP) Report on Carcinogens	
Not available.	
Reproductive toxicity	May damage fertility or the unborn child.
Specific target organ toxicity - single exposure	Narcotic effects.
Specific target organ toxicity - repeated exposure	Respiratory system. Skin. Kidneys. Central nervous system. Eyes. Liver. May cause damage to organs through prolonged or repeated exposure.
Aspiration hazard	May be fatal if swallowed and enters airways.
Chronic effects	Prolonged inhalation may be harmful. Prolonged exposure may cause chronic effects. May cause damage to organs through prolonged or repeated exposure.

12. Ecological information

Ecotoxicity Toxic to aquatic life with long lasting effects. Accumulation in aquatic organisms is expected.

Components	Species	Test Results
Acetone (CAS 67-64-1)		
Aquatic		
Crustacea	EC50	Water flea (Daphnia magna) 21.6 - 23.9 mg/l, 48 hours
Fish	LC50	Rainbow trout, donaldson trout (Oncorhynchus mykiss) 4740 - 6330 mg/l, 96 hours
Dimethyl Ether (CAS 115-10-6)		
Aquatic		
Crustacea	EC50	Water flea (Daphnia pulex) 4.3 - 7.8 mg/l, 48 hours
Fish	LC50	Striped bass (Morone saxatilis) 10.302 - 16.743 mg/l, 96 hours
Toluene (CAS 108-88-3)		
Aquatic		
Algae	IC50	Algae 433.0001 mg/L, 72 Hours
Crustacea	EC50	Daphnia 7.645 mg/L, 48 Hours
		Water flea (Daphnia magna) 5.46 - 9.83 mg/l, 48 hours
Fish	LC50	Coho salmon, silver salmon (Oncorhynchus kisutch) 8.11 mg/l, 96 hours

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential No data available.

Partition coefficient n-octanol / water (log Kow)

2,2-Dimethylbutane	3.82
2,3-Dimethylbutane	3.42
2-Methylpentane	3.74
3-Methylpentane	3.6
Acetone	-0.24
Dimethyl Ether	0.1
Propane	2.36
Toluene	2.73

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Contents under pressure. Do not puncture, incinerate or crush. This material and its container must be disposed of as hazardous waste. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied. Do not re-use empty containers.

14. Transport information

DOT

UN number	UN1950
UN proper shipping name	Aerosols, flammable
Transport hazard class(es)	
Class	2.1
Subsidiary risk	-
Label(s)	2.1
Packing group	Not applicable.
Special precautions for user	Read safety instructions, SDS and emergency procedures before handling. Read safety instructions, SDS and emergency procedures before handling.
Special provisions	N82
Packaging exceptions	306
Packaging non bulk	None
Packaging bulk	None

This product meets the exception requirements of section 173.306 as a limited quantity and may be shipped as a limited quantity. Until 12/31/2020, the "Consumer Commodity - ORM-D" marking may still be used in place of the new limited quantity diamond mark for packages of UN 1950 Aerosols. Limited quantities require the limited quantity diamond mark on cartons after 12/31/20 and may be used now in place of the "Consumer Commodity ORM-D" marking and both may be displayed concurrently.

IATA

UN number	UN1950
UN proper shipping name	Aerosols, flammable
Transport hazard class(es)	
Class	2.1
Subsidiary risk	-
Label(s)	2.1
Packing group	Not applicable.
Environmental hazards	Yes
ERG Code	10L
Special precautions for user	Read safety instructions, SDS and emergency procedures before handling. Read safety instructions, SDS and emergency procedures before handling.

Other information

Passenger and cargo aircraft Allowed with restrictions.

Cargo aircraft only Allowed with restrictions.

Packaging Exceptions LTD QTY

IMDG

UN number UN1950

UN proper shipping name AEROSOLS

Transport hazard class(es)

Class 2.1

Subsidiary risk -

Label(s) 2.1

Packing group Not applicable.

Environmental hazards

Marine pollutant Yes

EmS F-D, S-U

Special precautions for user Read safety instructions, SDS and emergency procedures before handling. Read safety instructions, SDS and emergency procedures before handling.

Packaging Exceptions LTD QTY

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not applicable.

DOT



IATA; IMDG



Marine pollutant



General information

IMDG Regulated Marine Pollutant.

15. Regulatory information

US federal regulations

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Acetone (CAS 67-64-1)

Listed.

Toluene (CAS 108-88-3)

Listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories

Immediate Hazard - Yes
 Delayed Hazard - Yes
 Fire Hazard - Yes
 Pressure Hazard - No
 Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No**SARA 313 (TRI reporting)**

Chemical name	CAS number	% by wt.
Toluene	108-88-3	2.5 - 10

Other federal regulations**Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List**

Toluene (CAS 108-88-3)

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Dimethyl Ether (CAS 115-10-6)

Propane (CAS 74-98-6)

Safe Drinking Water Act (SDWA) Not regulated.**Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number**

Acetone (CAS 67-64-1) 6532

Toluene (CAS 108-88-3) 6594

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

Acetone (CAS 67-64-1) 35 %WV

Toluene (CAS 108-88-3) 35 %WV

DEA Exempt Chemical Mixtures Code Number

Acetone (CAS 67-64-1) 6532

Toluene (CAS 108-88-3) 594

US state regulations**US. California Controlled Substances. CA Department of Justice (California Health and Safety Code Section 11100)**

Not listed.

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd. (a))

Acetone (CAS 67-64-1)

Toluene (CAS 108-88-3)

US. Massachusetts RTK - Substance List

2,2-Dimethylbutane (CAS 75-83-2)

2,3-Dimethylbutane (CAS 79-29-8)

2-Methylpentane (CAS 107-83-5)

3-Methylpentane (CAS 96-14-0)

Acetone (CAS 67-64-1)

Dimethyl Ether (CAS 115-10-6)

Propane (CAS 74-98-6)

Toluene (CAS 108-88-3)

US. New Jersey Worker and Community Right-to-Know Act

2,2-Dimethylbutane (CAS 75-83-2)

2,3-Dimethylbutane (CAS 79-29-8)
2-Methylpentane (CAS 107-83-5)
Acetone (CAS 67-64-1)
Dimethyl Ether (CAS 115-10-6)
Propane (CAS 74-98-6)
Toluene (CAS 108-88-3)

US. Pennsylvania Worker and Community Right-to-Know Law

2,2-Dimethylbutane (CAS 75-83-2)
2,3-Dimethylbutane (CAS 79-29-8)
2-Methylpentane (CAS 107-83-5)
3-Methylpentane (CAS 96-14-0)
Acetone (CAS 67-64-1)
Dimethyl Ether (CAS 115-10-6)
Propane (CAS 74-98-6)
Toluene (CAS 108-88-3)

US. Rhode Island RTK

Acetone (CAS 67-64-1)
Dimethyl Ether (CAS 115-10-6)
Propane (CAS 74-98-6)
Toluene (CAS 108-88-3)

US. California Proposition 65

WARNING: This product contains a chemical known to the State of California to cause cancer and birth defects or other reproductive harm.

US - California Proposition 65 - CRT: Listed date/Carcinogenic substance

Ethyl Benzene (CAS 100-41-4) Listed: June 11, 2004
Naphthalene (CAS 91-20-3) Listed: April 19, 2002

US - California Proposition 65 - CRT: Listed date/Developmental toxin

Toluene (CAS 108-88-3) Listed: January 1, 1991

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	No
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	No
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	No
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	No
Korea	Existing Chemicals List (ECL)	No
New Zealand	New Zealand Inventory	No
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	No
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision




Issue date 06-02-2014

Version # 02

Disclaimer

The information in the sheet was written based on the best knowledge and experience currently available. The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

Product Data Sheet

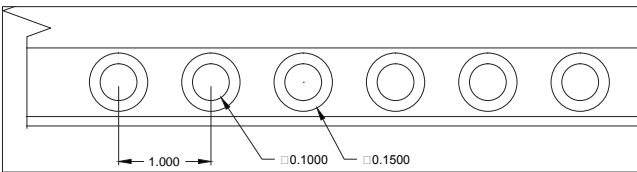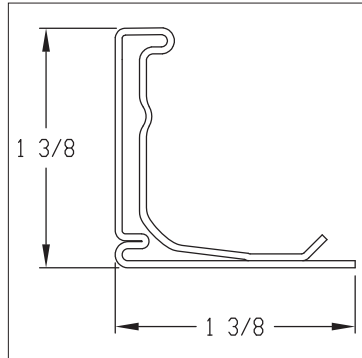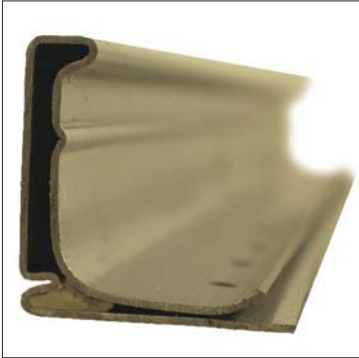

Description

The Elgen Flange is designed with two purposes in mind. The first is to provide external duct reinforcement, and the second is to provide a joining system between two similar size joints of duct.

Please refer to Elgen's 4-Corner Connection System document for fabrication, and assembly instructions.

*U.S. Patent 9,212,770;
Canadian Patent 2,638,806;
U.S. Patent Pending - Application No. 14/947,743*

Standard Construction

Roll formed 20GA galvanized steel that comes with a butyl sealant inside of the pocket to ensure an energy efficient seal.

Product comes standard in 10 and 20 foot lengths.

Duct Wall Size (in)	Pressure (in WG)	
	0-4	6-10
0-24	1 Screw each corner and center	1 Screw each corner and center
25-48	1 Screw each corner, plus 1 at center	2 Screws each corner, plus 1 screw every 12"
49 & over	1 Screw each corner, plus 1 every 12"	2 Screws each corner, plus 1 screw every 8"

Features

Union Made Yellow Label
Butyl in pocket for an energy efficient seal.
Sealing Materials meet NFPA 90A & B Class 1 requirements.

Optional Construction

Stainless Steel 304
Stainless Steel 316
Aluminum
PCD
Galvanneal (Paint Grip)
Agion (Antimicrobial Coating)

Technical Information

The Elgen Flange is tested in accordance with SMACNA testing procedures.

No external sealant was employed and the test results reveal: The Elgen Flange System is comparable to the SMACNA Class "J" transverse joint.

The Elgen Flange in stainless steel exhibits the same performance as galvanized.

The Elgen Flange in Aluminum is comparable to a SMACNA H connection.

Do not notch the corners when fabricating duct work for the Elgen Flange System.

Packaging

Bundled in 10 and 20 foot lengths protected on 4 sides with corner board. Every bundle is banded using spring steel securing it to wooden blocks.

Length (ft)	Bundle Qty (ft)	Weight (lbs)
10	750	530
20	1,500	1060

Guarantee

All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing

10 Railroad Ave, Closter NJ 07624



Tel: 800.503.9805 :: Fax: 201.964.9030

info@elgenmfg.com :: www.elgenmfg.com

NOTCH LOCK



Product Data Sheet

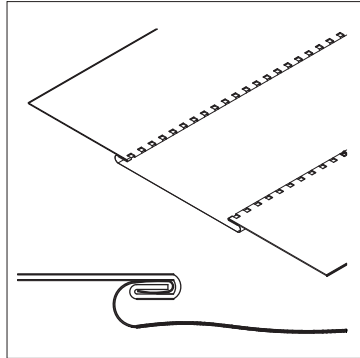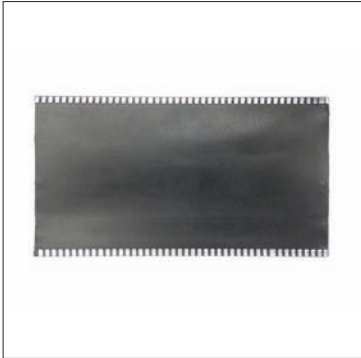

Description

Elgen's Notch Lock eliminates duct system noises and vibrations. This is done with an airtight flexible connection consisting of a fabric that attaches to sheet metal on both sides.

Elgen's Notch Lock Flexible Connector attaches to a fan source on one side and ductwork on the other.

Standard Construction

Formed with ASTM A-653 G60 material

	Vinlon (ZLL)	Neoprene (ZLN)	Hypalon (ZLH)	
Temp Range	-40 F to 180 F	-40 F to 200 F	-50 F to 300 F	
Color	Black	Black	White	
Weight SQ/YD	22	32	24	
Tear Strength	100/100	25/25	20/20	
Tensile Strength	300/300	500/500	350/250	
Features	High Tear Strength, High Abrasion, Low Smoke, Extremely Flexible	Airtight Resistance to Acids, Gasoline & Grease, General Purpose	Excellent Acid, Weather, UV, Mildew & Ozone Resistance, High Abrasion, Resistant to Grease	
	Silguard (ZLSG)	Teflon (ZLTF)	40oz Neoprene (ZLN)	Super High Temp
Temp Range	-75 F to 500 F	-75 F to 500 F	-40 F to 285 F	-40 F to 1800 F
Color	White	Gray	Black	Gray/White
Weight SQ/YD	18	18	40	36
Tear Strength	50/40	60/40	17/12	60/60
Tensile Strength	200/150	400/300	630/465	480/330
Features	High Temp, Very Low Smoke, Flame, Water & Oil Resistant	High Temp & Acid Resistant, Best Overall Fabric		

Features

All Elgen fabrics are designed to meet NFPA-701 (formerly UL-214)
22 GA With 40 oz Neoprene Tested At 23" Positive Static Pressure

Elgen Vinlon fabric meets UL-723 and NFPA-701

All Elgen fabrics are designed to meet NFPA-90A and 90B

All fabrics are water proof and airtight to +/- 10"w.g.

All fabrics have flame retardant coatings

All items are Flame Resistant

Tested in accordance with LEEDS®

Requirements Meets SMACNA

Made with Domestic Galvanized Steel

Union Made

Optional Construction

G90

Stainless Steel 304

Stainless Steel 316

Aluminum

PCD

Galvanneal (Paint Grip)

Agion (Antimicrobial Coating)

Packaging

Size	Gauge	FT Per Box
All Sizes	24-26	100'

Guarantee

All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing

10 Railroad Ave, Closter NJ 07624

Tel: 800.503.9805 :: Fax: 201.964.9030


info@elgenmfg.com :: www.elgenmfg.com

HET

with Elgen Super Standoff and 3/8" Square Rod



Product Data Sheet

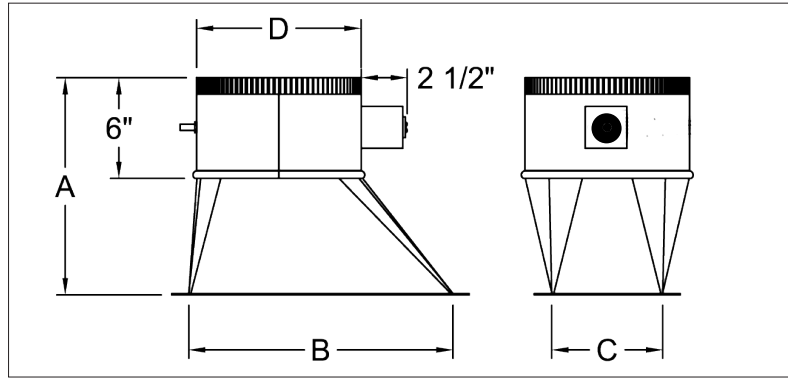

Description

Elgen's HET (High Efficiency Take Off) with heavy duty standoff is used for low & medium pressure applications.

Elgen HET (High Efficiency Take Off) with heavy duty standoff can be used for high pressure application (up to 10" W.G.) as a low-leakage fitting due to its welded construction.

Standard Construction

- Collar - formed from 24 GA ASTM A-653 G60 material
- Body - formed from 26 GA ASTM A-653 G60 material
- 1/8" x 1" Polyethylene "High Density" Gasket
- 20 GA Heavy Duty Damper Blade for 10" and larger
- 22 GA Heavy Duty Damper Blade for 6"- 8"
- Heavy-duty standoff
- 3/8" aluminum square rod
- Super snap-in bushing

D	B X C	A
4" Round	10"x 5"	11.75"
5" Round	10"x 5"	11.75"
6" Round	12"x 6"	11.75"
7" Round	12"x 6"	11.75"
8" Round	12"x 6"	11.75"
9" Round	15"x 6"	12.75"
10" Round	16"x 6.75"	12.75"
12" Round	18"x 8.5"	12.75"
14" Round	20"x 9.5"	12.75"
16" Round	22"x 14"	13.75"
18" Round	22"x 16"	13.75"
20" Round	24"x 18"	14"

B and C dimensions are "I.D." hole size dimensions
All dimensions +/- 0.25"

Features

- Welded Seams For Added Strength
- Welded Seams Provide Low Leakage
- Many Damper Hardware Options
- Pressure Rating – Designed Per SMACNA 3rd Edition 2005 Section 4.8 4-6 Brand Connections
- Union Made Yellow Label

Optional Construction

- Insulation Guard
- Deep manual bead
- 24 GA Galvanized
- G90 Galvanized
- Stainless Steel 304
- Stainless Steel 316
- Aluminum
- PCD
- Galvanneal (Paint Grip)
- Agion (Antimicrobial Coating)

Packaging

Size	Skid Qty	Size	Skid Qty
4"	MTO	10"	72
5"	MTO	12"	54
6"	140	14"	48
7"	MTO	16"	30
8"	140	18"	MTO
9"	MTO	20"	MTO


Guarantee

All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing

10 Railroad Ave, Closter NJ 07624
Tel: 800.503.9805 :: Fax: 201.964.9030
info@elgenmfg.com :: www.elgenmfg.com

Product Data Sheet

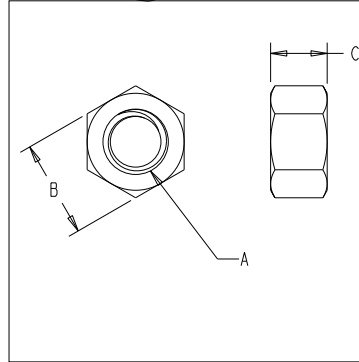

Features

Material Meets ASTM A563 Grade A.
 Dimensions: ASME/ANSI B18.2.2
 Zinc Plating meets ASTM F1941 FeZn3A
 Typical Hardness: HRB 68- HRC32
 Proof Load Strength: 90,000 PSI Min
 (Proof load is defined as an axially-applied load using a bolt or mandrel that must be supported by a nut without evidence of thread stripping or rupture.)

Description

Elgen's Hex nut is used in conjunction with all 4-bolt Flange systems.

Optional Construction

Stainless Steel 304
 Stainless Steel 316
 Aluminum

Standard Construction

Made from Low Carbon steel - ASTM A307 - Grade A.

Packaging

Item	Size (in)	Box Qty	Skid Qty
Hex Nut	3/8	4,000	144,000
Hex Nut	1/4	9,000	324,000

Nut Size (A)	Socket Size (B)	Thickness (C)	Nut Size (A)	Socket Size (B)	Thickness (C)
1/4	7/16	7/32	9/16	13/16	31/64
5/16	1/2	17/64	5/8	15/16	35/64
3/8	9/16	21/64	3/4	1-1/8	61/64
7/16	5/8	3/8	7/8	1-5/16	3/4
1/2	3/4	7/16	1	1-1/2	55/64

Guarantee

All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing
 10 Railroad Ave, Closter NJ 07624
 Tel: 800.503.9805 :: Fax: 201.964.9030
 info@elgenmfg.com :: www.elgenmfg.com



QuietR® Rotary Duct Liner



Description

Owens Corning® QuietR® Rotary Duct Liner absorbs noise within sheet metal ducts, and contributes to indoor comfort by lowering heat loss or gain through duct walls.

Features

- Absorbs fan and air turbulence noise and reduces popping noises within sheet metal ducts
- Outstanding thermal and acoustical performance
- Bacterial and fungal growth resistant with an EPA registered biocide that helps protect the airstream surface from microbial growth

Physical Properties

Property	Test Method	Value
Operating Temperature	ASTM C411	250°F (121°C)
Maximum Air Velocity	UL 181 Erosion Test ASTM C1071	6,000 fpm (30.5 m/sec)
Water Vapor Sorption (by weight)	ASTM C1104	<3% at 120°F (49°C), 95% R.H.
Fungi Resistance	ASTM C1338	Meets requirements
Fungi Resistance	ASTM G21	Meets requirements
Bacteria Resistance	ASTM G22	Meets requirements
Corrosiveness ¹	ASTM C665 (Corrosiveness Test)	Will not cause corrosion greater than caused by sterile cotton on aluminum or steel*
Thermal Conductivity k at 75°F (λ at 24°C mean)	ASTM C518	Btu·in/hr·ft ² ·°F W/m·°C
R-2.2		0.23 0.034
R-4.2		0.24 0.035
R-6.3		0.24 0.035
R-8		0.24 0.035
Surface Burning Characteristics ²	ASTM E84, UL 723, CAN/ULC S102	
Flame Spread		25
Smoke Developed		50

1. When wet, coated surfaces of QuietR® Rotary Duct Liner in contact with galvanized steel may cause discoloration of the sheet metal.
 2. The surface burning characteristics of these products have been determined in accordance with UL 723 or CAN/ULC-S102. This standard should be used to measure and describe the properties of materials, products or assemblies in response to heat and flame under controlled laboratory conditions and should not be used to describe or appraise the fire hazard or fire risk of materials, products or assemblies under actual fire conditions. However, results of this test may be used as elements of a fire risk assessment which takes into account all of the factors which are pertinent to an assessment of the fire hazard of a particular end use. Values are reported to the nearest 5 rating. UL 723 and ASTM E84 are the same test methods.

Availability

Thickness		Roll Length		R-Value	
in	mm	ft	m	(hr·ft ² ·°F)/Btu	(m ² ·°C)/W
½	13	100	31	2.2	0.38
1	25	100, 150*	31, 45*	4.2	0.74
1½	38	50, 100	15, 31	6.3	1.11
2	51	50	15	8.0	1.41

*150' (45m) roll is available in select sizes 56" and wider. Ask your area sales manager for more details.

Applications

Limitations

Use of QuietR® Rotary Duct Liner is not recommended for the following applications:

- With wood or coal fired equipment, or equipment of any type which does not include automatic maximum temperature controls and where operating temperatures of 250°F (121°C) may be exceeded
- In kitchen or fume exhaust ducts, or ducts conveying solids or corrosive gases
- In any application where the duct liner may come in direct contact with liquid water (such as cooling coils, humidifiers, and evaporative coolers) unless protected from the water source
- Inside fire damper sleeves
- Immediately adjacent to high temperature heating coils without radiation protection

Acoustic Performance

Tested Values—QuietR® Duct Liner							
Sound absorption coefficients at octave band center frequencies (Hz)							
Thickness in (mm)	125	250	500	1000	2000	4000	NRC
½ (13)	0.04	0.12	0.39	0.64	0.78	0.74	0.50
1 (25)	0.05	0.30	0.60	0.87	0.98	1.05	0.70
1½ (38)	0.05	0.47	0.85	1.01	1.01	1.01	0.85
2 (51)	0.12	0.66	1.04	1.08	1.04	1.07	0.95

These data were collected using a limited sample size and are not absolute values. Reasonable tolerances must therefore be applied. All tests were conducted in accordance with ASTM C423, Mounting A (material placed against a solid backing such as a block wall). For more information, call your Owens Corning Representative.

Insertion Loss, dB per ft of Lined Duct

P/A, ft/ft ²	1" Liner						2" Liner					
	Octave band center frequencies, Hz						Octave band center frequencies, Hz					
	125	250	500	1000	2000	4000	125	250	500	1000	2000	4000
8	0.6	1.5	2.7	5.8	7.4	4.3	0.8	2.9	4.9	7.2	7.4	4.3
6	0.5	1.2	2.3	5.0	5.8	3.6	0.6	2.3	4.2	6.2	5.8	3.6
4	0.4	0.8	1.9	4.0	4.1	2.8	0.5	1.6	3.5	5.0	4.1	2.8
2	0.2	0.5	1.4	2.8	2.2	1.8	0.3	0.8	2.3	3.3	2.0	1.7
1	0.1	0.1	1.0	2.0	1.2	1.2	0.2	0.5	1.8	2.3	1.1	1.1

Duct Liner Insertion Loss—Data extracted from ASHRAE Handbook, HVAC Applications, Chapter 43, 1999
 P/A = duct perimeter, ft/duct cross sectional area (ft²). Example: 12" x 12", P/A = 4 (1/ft). For more information, call your Owens Corning Representative.

Standards, Codes Compliance

- ASTM C1071, Type I, Flexible (replaces obsolete Federal Specification HH-1-545B.)
- NFPA 90A/90B
- ICC Compliant
- California Title 24
- SMACNA Application Standard for Duct Liners
- NAIMA Fibrous Glass Duct Liner Installation Standard
- Conforms to ASHRAE 62-2001

Environmental and Sustainability

Owens Corning is a worldwide leader in building material systems, insulation and composite solutions, delivering a broad range of high-quality products and services.

Owens Corning is committed to driving sustainability by delivering solutions, transforming markets and enhancing lives. More information can be found at www.owenscorning.com.

Notes

For additional information, refer to the Safe Use Instruction Sheet (SUIS) found in the SDS Database via <http://sds.owenscorning.com>

Certifications and Sustainable Features

- Certified by SCS Global Services to contain a minimum of 53% recycled glass content, 31% pre-consumer and 22% post-consumer
- GREENGUARD Certified products are certified to GREENGUARD standards for low chemical emissions into indoor air during product usage. For more information, visit ul.com/gg*
- Bronze Level Material Health Certificate from Cradle to Cradle Products Innovation Institute



*Duct Liner up to and including 1".

Disclaimer of Liability

Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Because conditions of use may vary and are beyond our control, Owens Corning makes no representation about, and is not responsible or liable for the accuracy or reliability of data associated with particular uses of any product described herein.

SCS Global Services provides independent verification of recycled content in building materials and verifies recycled content claims made by manufacturers. For more information, visit www.SCSglobalservices.com.

LEED® is a registered trademark of the U.S. Green Building Council.



OWENS CORNING INSULATING SYSTEMS, LLC
ONE OWENS CORNING PARKWAY
TOLEDO, OHIO, USA 43659

1-800-GET-PINK®
www.owenscorning.com


Pub. No. 10004451-J. Printed in U.S.A. September 2016.
THE PINK PANTHER™ & © 1964–2016 Metro-Goldwyn-Mayer Studios Inc.
All Rights Reserved. The color PINK is a registered trademark of Owens Corning.
© 2016 Owens Corning. All Rights Reserved.



Snap Lock Pipe



Product Data Sheet

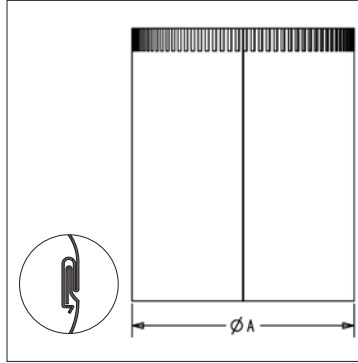

Description

Elgen's Snap Lock Pipe is used for low pressure applications.

Standard Construction

Manufactured from 26 GA ASTM A-653 & ASTM A-924 G60 material.
60" length

Features

Meets SMACNA RL-8 Longitudinal Seam-page 3.5 figure 3-2 in 2005 3rd edition
Reeves Lock and Button Lock come standard on every piece.
Pressure rating (-1" to +2" water gauge)
Union Made Yellow Label

Optional Construction

30 GA & 24 GA Galvanized
G90 Galvanized
48" & 24" lengths
Stainless Steel 304
Stainless Steel 316
Aluminum
PCD
Galvanneal (Paint Grip)
Agion (Antimicrobial Coating)

Packaging

Size (in) A	Length (in)	Bundle Qty	Skid Qty	Weight per Skid (lbs)
3	60	10	640	3,100
4	60	10	640	3,900
5	60	10	300	2,300
6	60	10	300	2,700
7	60	10	200	2,100
8	60	10	200	2,300
9	60	10	160	2,100
10	60	5	80	1,200
12	60	5	80	1,400
14	60	5	45	900
16	60	5	45	1,000

Guarantee


All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing
10 Railroad Ave, Closter NJ 07624
Tel: 800.503.9805 :: Fax: 201.964.9030
info@elgenmfg.com :: www.elgenmfg.com

STACKABLE C CORNER



Product Data Sheet

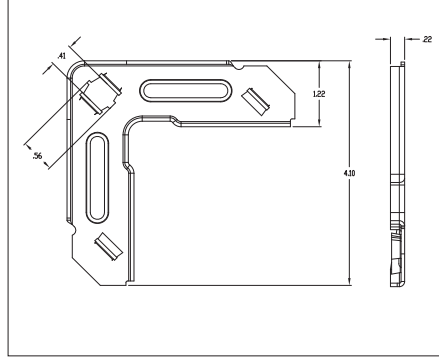

Description

Corner pieces are used to add rigidity to the flange, hold duct work together and provide a sealing surface for the gasket.

Standard Construction

Stamped 16 GA ASTM A-653 G60 material
Used with Auto Corner Insertion Machinery
Can also be inserted manually
Accepts a 3/8" carriage bolt
Weight(per box): 38 lbs

Features

Add rigidity to the Transverse Duct Flange
Hold ductwork together
Provides a sealing surface for the Elgen 440 Butyl Gasket
Tabs on the legs allow for the corners to stack
Union Made

Optional Construction

Stainless Steel 304
Stainless Steel 316
Aluminum
Galvanneal (Paint Grip)

Packaging

Box Qty	Skid Qty
250	28,000

Stacked in box

Guarantee


All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing
10 Railroad Ave, Closter NJ 07624
Tel: 800.503.9805 :: Fax: 201.964.9030
info@elgenmfg.com :: www.elgenmfg.com

Vane Rail (2" & 4")



Product Data Sheet

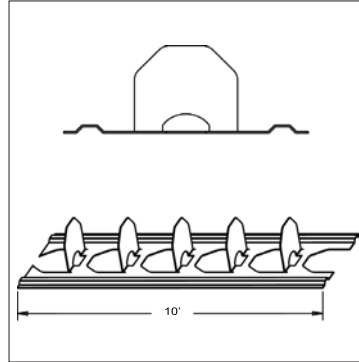

Features

Conforms to SMACNA spacing requirements.
Refer to 2005 SMACNA-Figure 4-3.
Holes provide for easy alignment
Can be used with other vane systems
Union Made Yellow Label

Description

Elgen's 2" & 4" Double Wall Turning Vane Rail is used in conjunction with Elgen's 2" & 4" Double Wall Turning Vane.
Elgen's 2" & 4" Double Wall Turning Vane Rail is used for securing and aligning Elgen's 2" & 4" Turning Vanes. This process directs the airflow through rectangular elbows.

Optional Construction

Stainless Steel 304
Stainless Steel 316
Aluminum
PCD
Galvanneal (Paint Grip)
Agion (Antimicrobial Coating)

Standard Construction

Stamped using 22 GA ASTM A-653 G60/G90
Material
10' length

Packaging

Size (in)	GA	Box Qty (ft)	Skid Qty (ft)	Weight (lbs)
2	22	200	7000	3100
4	22	100	3500	2300

Guarantee


All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing
10 Railroad Ave, Closter NJ 07624
Tel: 800.503.9805 :: Fax: 201.964.9030
info@elgenmfg.com :: www.elgenmfg.com

Elgen Superpoint Weld Pins



Product Data Sheet

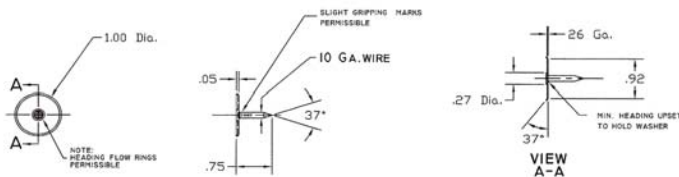

Features

- Raised Head which allows better movement through the hopper
- Can be used in any Insulation Weld Pin Machine
- Rings in the nail head provide more consistent welds
- Superior strength (Average test is over 145 lbs of force)
- Beveled edge prevents tearing of the fiberglass liner
- Hardened washer provided added strength
- Meets SMACNA Standards
- (Refer to Chapter 7 figure 7-11 & 7-12)

Description

Elgen Superpoint Weld Pins are used for fastening Fiberglass Duct Liner to the inside of the Duct Wall.

Standard Construction

The pin is made from 10 GA Electroplated Galvanized Steel
 The washer is made from 28 gauge Full Hard Galvanized Steel

Packaging

Size (in)	Liner Thickness (in)	Density (lbs)	Bucket Qty	Weight (lbs)
1/2	1/2	All	6000	31
3/4	1	1-1/2	5000	33
1	1	3	4000	40
1-1/8	1-1/2	All	4000	34
1-1/4	1-1/2	All	4000	34
1-1/2	2	1-1/2 - 2	3500	35


Guarantee

All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing
 10 Railroad Ave, Closter NJ 07624
 Tel: 800.503.9805 :: Fax: 201.964.9030
 info@elgenmfg.com :: www.elgenmfg.com



QuietR® Spiral Duct Liner

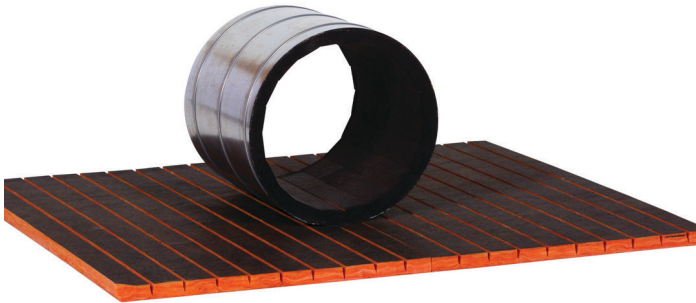

Description

Owens Corning® QuietR® Spiral Duct Liner is tailored to fit your specific duct size, compression at grooves and joints is kept to a minimum, providing consistent thermal performance throughout the entire duct system.

Features

- Outstanding thermal and acoustical performance
- Economical, cost effective alternative to round double-wall configuration air ducts
- Cleanable surface with a black mat facing that provides a smooth, durable surface making it easier to clean the duct liners using methods and equipment described in North American Insulation Manufacturers Association (NAIMA) Publication AH122, Cleaning Fibrous Glass Insulated Duct Systems: Recommended Practice
- Bacterial and fungal growth resistant with an EPA registered biocide that protects the airstream surface from microbial growth

Physical Properties

Property	Test Method	Value
Maximum Temperature Limits	UL 181	
Internal		250°F (121°C)
External		150°F (66°C)
Maximum Air Velocity	UL 181 Erosion Test	6,000 fpm (30.5 m/s)
Water Vapor Sorption	ASTM C1104	<3% by weight at 120°F (49°C), 95% R.H.
Mold Growth	UL 181	Meets Requirements
Mold Growth	ASTM C1338	Meets Requirements
Fungi Resistance	ASTM G21	Meets Requirements
Bacteria Resistance	ASTM G22	Meets Requirements
Surface Burning Characteristics	UL 723 ¹	
Flame Spread		<25
Smoke Developed		<50

1. The surface burning characteristics of these products have been determined in accordance with UL 723. This standard should be used to measure and describe the properties of materials, products or assemblies in response to heat and flame under controlled laboratory conditions and should not be used to describe or appraise the fire hazard or fire risk of materials, products or assemblies under actual fire conditions. However, results of this test may be used as elements of a fire risk assessment which takes into account all of the factors which are pertinent to an assessment of the fire hazard of a particular end use. Values are reported to the nearest 5 rating. ASTM E84, UL 723, and NFPA 255 are considered by most officials to be synonymous surface burning test methods.

Applications

Limitations

QuietR® Spiral Duct Liner is not recommended for the following applications:

- Ducts which will be subjected to operating temperatures exceeding 250°F (inside surface)
- Ducts which will be subjected to temperatures exceeding 150°F on the outside surface
- Kitchen or fume exhaust ducts or to convey solids or corrosive gases
- Burying in concrete or buried below grade
- Installation immediately adjacent to high-temperature electric heating coils without radiation protection and to equipment such as evaporative coolers, humidifiers, cooling coils and outside intakes
- With coal or wood-fueled equipment, or with equipment of any type which does not include automatic maximum temperature controls
- Ducts which will be subject to liquid water, liner should be protected with a sheet metal sleeve and drip pan adjacent
- Inside fire damper sleeves
- When duct systems run through unconditioned space and are used for cooling only (when heating is from another source), register openings must be tightly sealed to prevent accumulation of water vapor in the duct system during the heating season

Installation

See Owens Corning® "QuietR® Spiral Duct Liner publication Installation Guide" (Pub. No. 61262) for more information installation of the liner.

Availability

Thickness
48" x 120" x 1" thickness (1,220mm x 3,048mm x 25mm)
48" x 120" x 1½" thickness (1,220mm x 3,048mm x 38mm)
48" x 120" x 2" thickness (1,220mm x 3,048mm x 51mm)

Thermal Performance

at 75°F (24°C) Mean Temperature	1" (25mm)	1½" (38mm)	2" (51mm)
R-value: ft ² •°F/BTU (RSI: m ² •°C/W)	4.3 (0.76)	6.5 (1.15)	8.70 (1.53)
k-value: BTU•in/hr•ft ² •°F (l W/m ² •°C)	0.23 (0.033)	0.23 (0.033)	0.23 (0.033)

Acoustical Performance

Sound absorption coefficients at octave band center frequencies, Hz.

Thickness	125	250	500	1000	2000	4000	NRC
1"	0.08	0.19	0.69	0.94	0.99	0.98	0.70
1½"	0.12	0.33	0.92	1.04	1.03	1.02	0.85
2"	0.14	0.72	1.15	1.12	1.06	1.07	1.00

This data was collected using a limited sample size and are not absolute values. Therefore, reasonable tolerances must be applied. Tests were conducted in accordance with ASTM C423, Mounting A (material applied against a solid backing).

Standards, Codes Compliance

- ASTM C1071; Type II Ridge Board
- National Fire Protection Association Standards NFPA 90A/90B
- ICC International Mechanical Code
- Meets requirements of ASTM C1338, UL 181, ASTM G21, (fungi test) and ASTM G22 (bacteria test)

Technical Information

Tips to Avoid Mold Growth in Ducts

Mold in duct systems occurs when moisture comes into contact with dirt or dust collected on the duct system surfaces. Proper filters will minimize the collection of dust and dirt, but care needs to be exercised to prevent water formation in the duct. A properly sized, installed and operated air conditioning unit will minimize the likelihood of water formation. The system must be maintained and operated to ensure that sufficient dehumidification is occurring and that filters are installed and changed as recommended by the equipment manufacturer.

Environmental and Sustainability

Owens Corning is a worldwide leader in building material systems, insulation and composite solutions, delivering a broad range of high-quality products and services. Owens Corning is committed to driving sustainability by delivering solutions, transforming markets and enhancing lives. More information can be found at www.owenscorning.com.

Notes

For additional information, refer to the Safe Use Instruction Sheet (SUIS) found in the SDS Database via <http://sds.owenscorning.com>.

This product is supplied by fabricators across North America. Please consult Owens Corning for a list of fabricators who can supply QuietR[®] Spiral Duct Liner.

Certifications and Sustainable Features

- Certified by SCS Global Services to contain a minimum of 53% recycled glass content, 31% pre-consumer and 22% post-consumer
- GREENGUARD Certified products are certified to GREENGUARD standards for low chemical emissions into indoor air during product usage. For more information, visit ul.com/gg*
- Material Health Certificate from Cradle to Cradle Products Innovation Institute



*Duct Liner up to and including 1".

Disclaimer of Liability

Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Because conditions of use may vary and are beyond our control, Owens Corning makes no representation about, and is not responsible or liable for the accuracy or reliability of data associated with particular uses of any product described herein.

SCS Global Services provides independent verification of recycled content in building materials and verifies recycled content claims made by manufacturers. For more information, visit www.SCSglobalservices.com.

LEED[®] is a registered trademark of the U.S. Green Building Council.



OWENS CORNING INSULATING SYSTEMS, LLC
ONE OWENS CORNING PARKWAY
TOLEDO, OHIO, USA 43659

1-800-GET-PINK[®]
www.owenscorning.com


Pub. No. 10018478-D. Printed in U.S.A. September 2017.
THE PINK PANTHER[™] & © 1964–2017 Metro-Goldwyn-Mayer Studios Inc.
All Rights Reserved. The color PINK is a registered trademark of Owens Corning.
© 2017 Owens Corning. All Rights Reserved.



2" Ultra Vane



Product Data Sheet

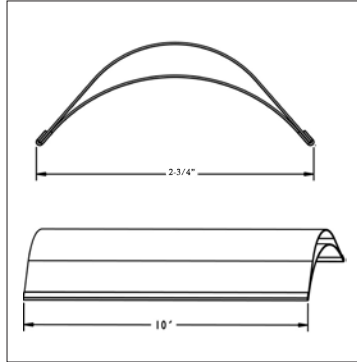

Features

- Patented- Made from one piece of metal
- Meets SMACNA requirements
- One Dimple per inch
- Can be used with other rail systems
- Union Made Yellow Label

Description

Elgen's 2" Ultra Vane (Double Wall Turning Vane) is used, in conjunction with Elgen's 2" Double Wall Vane Rail, for directing air flow through a rectangular elbow.

Optional Construction

- 22 or 24 GA ASTM A-653 G60/G90 Material
- Stainless Steel 304
- Stainless Steel 316
- Aluminum
- PCD
- Galvanneal (Paint Grip)
- Agion (Antimicrobial Coating)

Standard Construction

Rollformed using 26 GA ASTM A-653 G60 Material
10' length

Packaging

GA	Length (ft)	Bundle Qty (ft)	Skid Qty (ft)	Weight (lbs)
26	10	100	8500	3600

Guarantee


All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing
10 Railroad Ave, Closter NJ 07624
Tel: 800.503.9805 :: Fax: 201.964.9030
info@elgenmfg.com :: www.elgenmfg.com

4" Turning Vane



Product Data Sheet

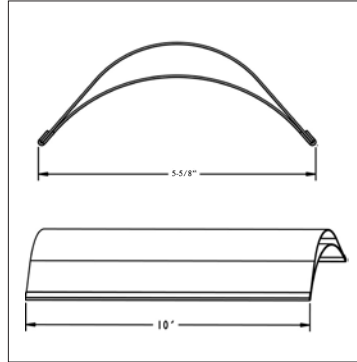

Features

- Meets SMACNA requirements
- One Dimple per inch
- Can be used with other rail systems
- Union Made Yellow Label

Description

Elgen's 4" Turning Vane (Double Wall) is used, in conjunction with Elgen's 4" Double Wall Vane Rail, for directing air flow through a rectangular elbow.

Optional Construction

- 20 or 22 GA ASTM A-653 G60/G90 Material
- Stainless Steel 304
- Stainless Steel 316
- Aluminum
- PCD
- Galvanneal (Paint Grip)
- Agion (Antimicrobial Coating)

Standard Construction

Rollformed using 24 GA ASTM A-653 G60
Material
10' length

Packaging

GA	Length (ft)	Bundle Qty (ft)	Skid Qty (ft)	Weight (lbs)
24	10	50	2100	2400

Guarantee

All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing
10 Railroad Ave, Closter NJ 07624
Tel: 800.503.9805 :: Fax: 201.964.9030
info@elgenmfg.com :: www.elgenmfg.com

440 Butyl Gasket



Product Data Sheet



Description

Elgen's UL 723 listed 440 Butyl Gasket is a high quality gray butyl gasket tape. It is designed for use with 4 bolt duct connection systems. It is non-curing and adheres extremely well to metal surfaces.

Standard Construction

3/16" x 5/8" x 25' of gray butyl tape extruded onto smooth silicone release paper and rolled onto a cardboard core.

Basic Use

Apply in normal dry working conditions. All surfaces need be free of dust, dirt, oil, moisture, grease, etc.

Apply directly from roll or cut to size with knife or scissors. Press 440 Butyl Gasket firmly into place with hand. Intimate contact must be made between tape and subsurface to assure a air-tight seal. Gently peel off silicone release paper. When lapping tape, allow at least 1/4" (6.4 mm) overlap.

Features

- UL 723 Listed - **R27308**
- Meets USDA and FDA Regulations and Standards.
- Superior Adhesion
- Provides Air-Tight Seal
- Shelf And Service Life: 20 Years Minimum
- Application Temp: Above 40° F
- Minimum 30% recycled material, which meets LEEDS requirements
- Contains no Solvent- Zero VOC's

Test Results

Test Method	Test	Typical Results
GSTM 10*	Color	Grey
ASTM C-771-74	Nonvolatile, % Weight @ 212± 3°F/100±-2°C	99+
ASTM D-217	Needle Penetration @ 77°F/25°C, 100 g/5 sec, 1/10 mm	60
ASTM D 792-66	Weight/Gallon @ 77°F Weight/Liter @ 25°C	14 lbs 1.68 kg
ASTM D 792-66	Specific Gravity @ 77°F/25°C	1.65
GSTM 11*	Service Temperature - Range	-30° to +180°F 34° to +82°C
ASTM D1833	Odor	No Unpleasant Odor
GSTM 13*	Elongation, % @ 77°F/25°C	400%+
GSTM 7*	Staining	No Migratory Staining
GSTM 16*	Sag (3 weeks @ 160°F/71°C)	None
ASTM C-765-73	Cold Temperature Flexibility 1/2" (12.7 mm) Mandel Bend @ -60°F/-51°C	No Cracking Or Loss Of Adhesion
GSTM 21*	Water Absorption, % Wt. Gain, 7 Days @ 160°F/71°C	0.75

UL 723 Listed (ASTM-E84)
Flame Spread 0/Smoke Density 1.8

Packaging

Box Qty(ft)	Skid Qty(ft)	Weight per Skid(lbs)
500	30,000	2800

Guarantee

All Elgen products are guaranteed by Elgen Manufacturing against defective material.

Elgen Manufacturing

10 Railroad Ave, Closter NJ 07624

Tel: 800.503.9805 :: Fax: 201.964.9030

info@elgenmfg.com :: www.elgenmfg.com



DRAFTING/FABRICATION/ESTIMATING

LEED SHEET CONSTRUCTION

558 Federal Rd Brookfield, CT
 06804
 Phone 203-885-0627 Fax 203-
 740-2441
 www.MyWinair.com

CLIENT	JOB	MEP/FAB PERSON

SPEC	DESCRIPTION	CHECK BOX
	1" WG PRESSURE CLASS	
	2" WG PRESSURE CLASS	
	4" WG PRESSURE CLASS	
	6" WG PRESSURE CLASS	
	10" WG PRESSURE CLASS	
	ALUMINUM 22GA	
	STAINLESS STEEL 24GA	
	STAINLESS STEEL WEILDED	
	BLACK IRON 10GA WEILDED	
	BLACK IRON 16GA WEILDED	
	ACOUSTIC LINER 1"	
	ACOUSTIC LINER 1 1/2"	
	ACOUSTIC LINER 2"	
	ACOUSTIC LINER 3"	
	ARMACELL ACOUSTIC LINER	
	DOUBLE WALL DUCT	
	SHEET METAL NOSING FOR LINER	
	BLUE PLASTIC WRAPED ENDS	
	DUCT SEALED PITTSBURGS	
	2" SFK WRAPED DUCT SILVER TAP	

THANK YOU FOR YOUR BUSINESS!