


HETO

with Super Standoff and 3/8" Rod



Product Data Sheet

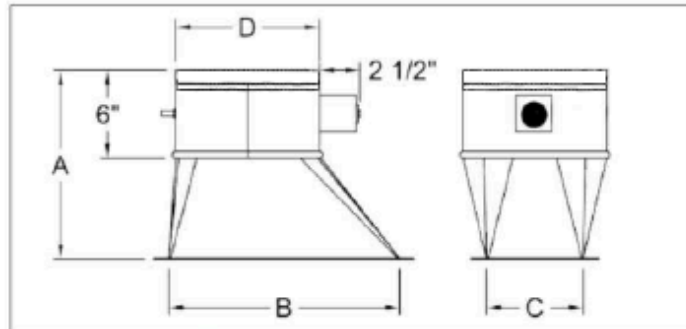

Description

Danbury Winair High Efficiency Take Off with heavy duty standoff is used for low & medium pressure applications.

Danbury Winair High Efficiency Take Off with heavy duty standoff can be used for high pressure application (up to 10" W.G.) as a low-leakage fitting due to its welded construction.

Standard Construction

Collar - formed from 24 GA ASTM A-653 G60 material
Body - formed from 24 GA ASTM A-653 G60 material
1/8" x 1" Polyethylene "High Density" Gasket
20 GA Heavy Duty Damper Blade for 10" and larger
22 GA Heavy Duty Damper Blade for 6"- 8"
Heavy-duty standoff
3/8" aluminum square rod
Super snap-in bushing

D	B X C	A
6" Round	12"x 6"	11.75"
7" Round	12"x 6"	11.75"
8" Round	12"x 6"	11.75"
9" Round	15"x 6"	12.75"
10" Round	16"x 6.75"	12.75"
12" Round	18"x 8.5"	12.75"
14" Round	20"x 9.5"	12.75"
16" Round	22"x 14"	13.75"
18" Round	22"x 16"	13.75"
20" Round	24"x 18"	14"

B and C dimensions are "I.D." hole size dimensions
All dimensions +/- 0.25"

Features

Welded Seams For Added Strength
Welded Seams Provide Low Leakage
Many Damper Hardware Options
Pressure Rating - Designed Per SMACNA 3rd Edition 2005
Section 4.8 4-6 Brand Connections

Optional Construction

Insulation Guard
Deep manual bead

24 GA Galvanized
G90 Galvanized
Stainless Steel
Galvanneal (Paint Grip)

Packaging

Size	Skid Qty	Size	Skid Qty
6"	140	14"	48
7"	MTO	16"	30
8"	140	18"	MTO
9"	MTO	20"	MTO

Guarantee

All Danbury Winair products are guaranteed by Danbury Winair against defective material.

Danbury Winair

558 Federal Rd, Danbury CT 06804
Tel: (888)671-3828
sheetmetal@mywinair.com : mywinair.com

ALL STATED SPECIFICATION ARE SUBJECT TO CHANGE WITHOUT NOTICE OR OBLIGATION